

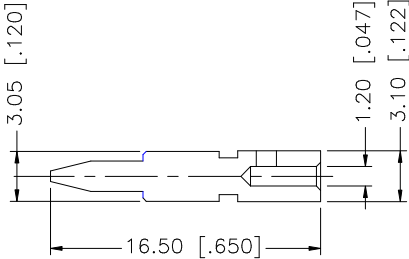
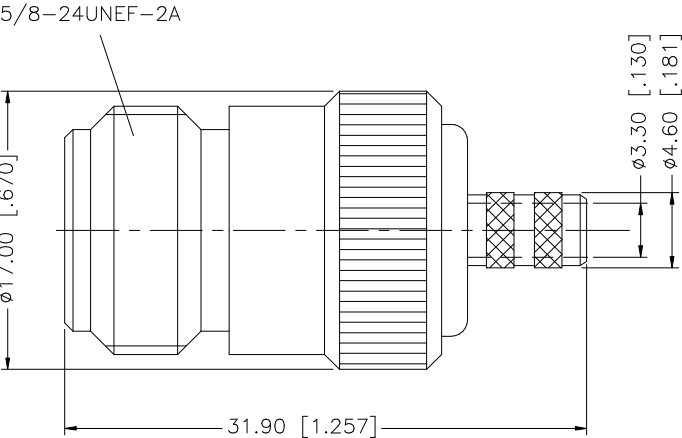


REV.	DATE	DESCRIPTION
NC	07/13/99	INITIAL RELEASE
A	07/31/05	UPDATE DRAWING FORMAT
B	01/03/07	REVISE FERRULE CRIMP NOTE TO .213" HEX

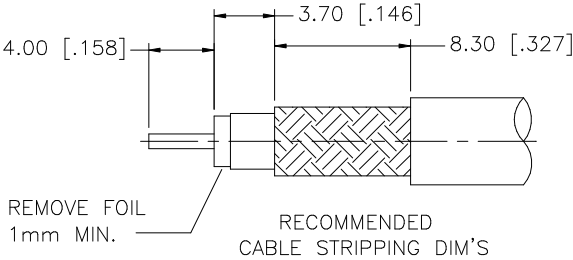

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .213"
 2. CRIMPED CONTACT PIN HEX CRIMP SIZE .100" OR SOLDER.

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex					
7						DRAWN	G.R.S.						01/03/07
6						CHECKED							
5						ISSUED			PART DESCRIPTION				
4	FERRULE	COPPER	NEXCOTE	1					N CRIMP JACK – REVERSE POLARIZED (FOR LMR 200 CABLE)				
3	CONTACT PIN	BRASS	GOLD	1				PART NO.					
2	INSULATOR	TEFLON	NATURAL	1				172216RP					
1	BODY	BRASS	NEXCOTE	1									
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE	C:/172/172216RP.DWG	DWG. NO.	172216RP.DWG	REV. B	SIZE A	SCALE NA