


NOTES:

1. ELECTRICAL CHARACTERISTICS:
CHARACTERSTIC IMPEDANCE: 50 OHM;
WORKING VOLTAGE: 1000 V
FREQUENCY RANGE: DC-11 GHz;
DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS
CONTACT RESISTANCE: CENTER CONTACT: <1 mOHM
OUTER CONTACT: < 0.2 mOHM
INSULATION RESISTANCE: >5000 mOHM
VSWR: <1.3 (DC - 3GHz)
MATCH CABLE: RG-316
OUTER CONTACT: 0.115" HEX CRIMP
CENTER CONTACT: SOLDER

172173-13

REVISIONS

DRAWING NO.	REV	DESCRIPTION	DATE	ECO	APPR
THIRD ANGLE PROJ.	A	RELEASE TO MFG.	23-Jun-09	--	CL

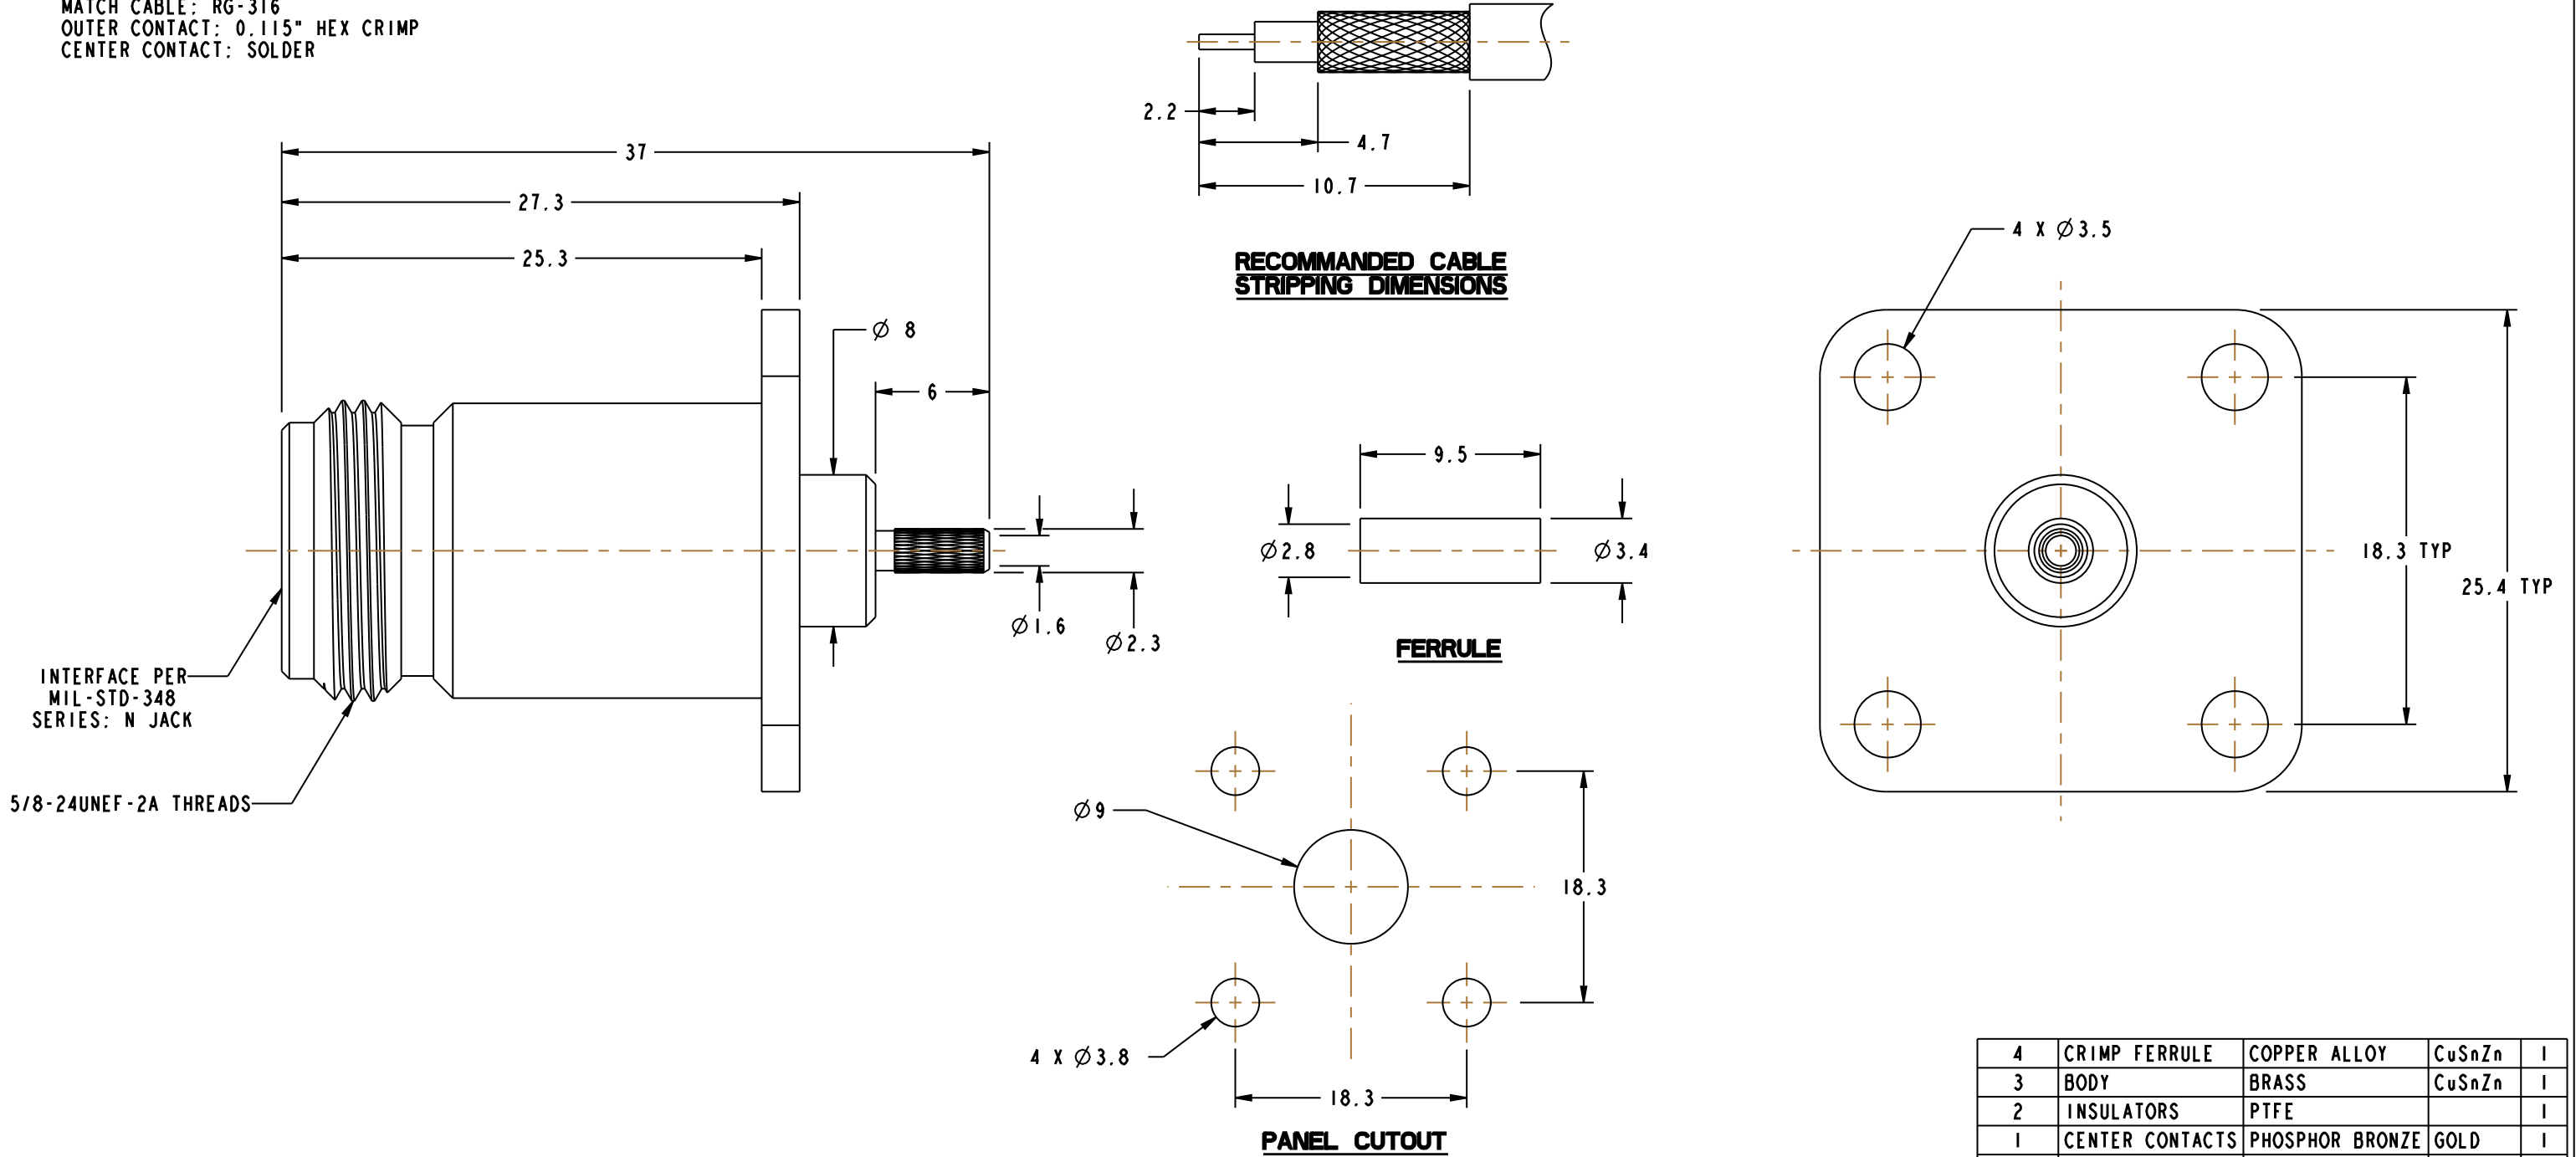

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 2 PLACE DECIMAL ±.015 (0.381 mm) 3 PLACE DECIMAL ±.005 (0.127 mm) ANGLES ± 1°	MATERIAL	DRAWN C. McGRATH	DATE 09-Jun-09	TITLE EXTENDED N PANEL JACK FOR RG-316/U	Amphenol Connex		
	REFERENCE	ENGINEER K. CAPOZZI	DATE 09-Jun-09				
		APPROVED	DATE				
	NOTICE - These drawings, specifications, or other data (1) are, and remain the property of Amphenol Corp. (2) must be returned upon request; and (3) are confidential and not to be disclosed to any person other than those to whom they are given by Amphenol Corp. The furnishing of these drawings, specifications, or other data by Amphenol Corp., or to any other person to anyone for any purpose is not to be regarded by implication or otherwise in any manner licensing, granting rights or permitting such holder or any other person to manufacture, use or sell any product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.		CAD FILE I:\N\172173-13		DWG SIZE B	DRAWING NO. 172173-13	REV A