


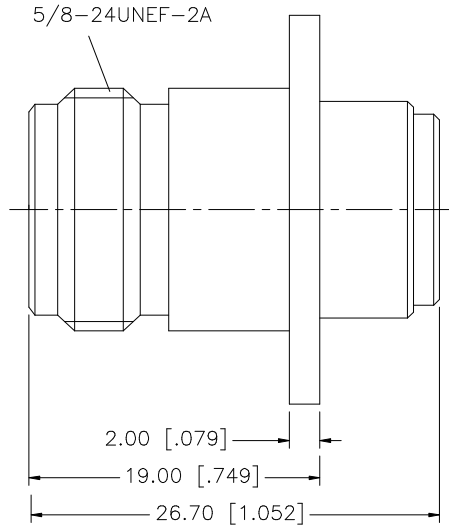
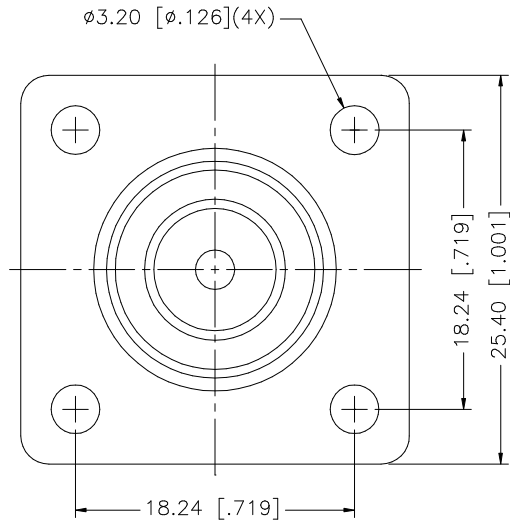


REV.	DATE	DESCRIPTION
NC	01/03/07	INITIAL RELEASE

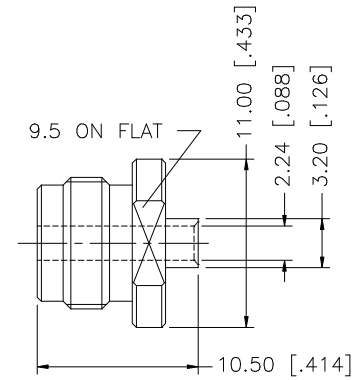

RECOMMENDED CABLE
STRIPPING DIM'S

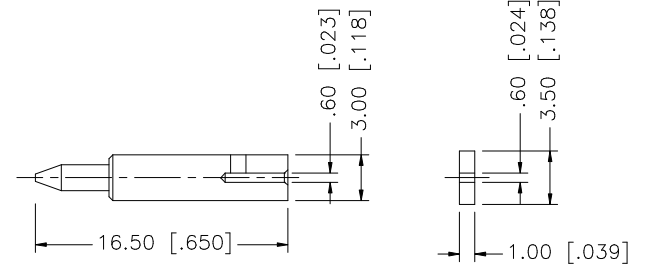

NOTE:
1. CONTACT PIN TO SOLDER

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex								
7						DRAWN	G.R.S.							01/03/07		
6						CHECKED										
5	SOLDER NUT	BRASS	NEXCOTE	1			ISSUED		PART DESCRIPTION							
4	INSULATOR	TEFLON	NATURAL	1			SHEET	1 OF 1	N REVERSE POLARITY PANEL DIRECT SOLDER JACK (FOR .085", .086")							
3	CONTACT PIN	BER. COPPER	GOLD	1					PART NO.							
2	INSULATOR	TEFLON	NATURAL	1					172169RP							
1	BODY	BRASS	NEXCOTE	1					DWG. NO.	172169RP.DWG		REV.	NC	SIZE	A	SCALE
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE		C:/172/172169RP.DWG								