


REV.	DATE	DESCRIPTION
NC	04/30/07	INITIAL RELEASE

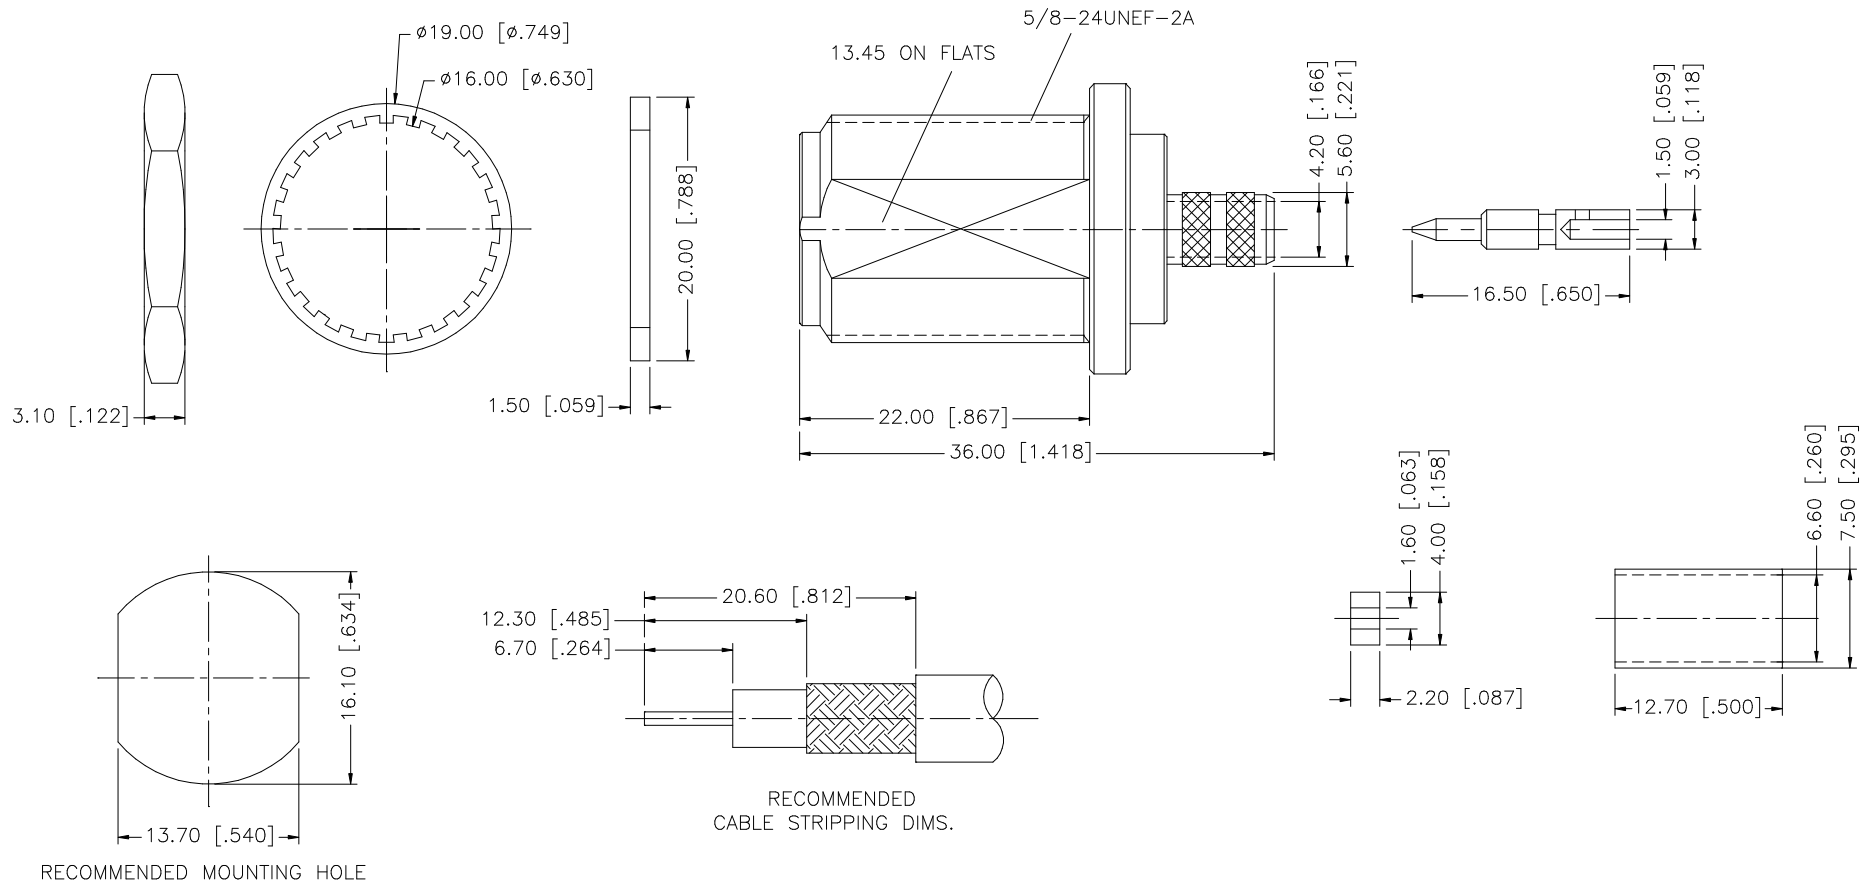

- NOTE:
1. CRIMPED FERRULE HEX CRIMP SIZE .255"
 2. CRIMPED CONTACT PIN HEX CRIMP SIZE .100"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS	DATE	Amphenol Connex									
7	FERRULE	COPPER	NEXCOTE	1		DRAWN	G.R.S.							04/30/07			
6	GASKET	SILICONE	RED	1		CHECKED			PART DESCRIPTION N BULKHEAD REVERSE POLARITY CRIMP JACK (FOR 8X, LMR 240 CABLE)								
5	HEX NUT	BRASS	NEXCOTE	1		ISSUED											
4	LOCK WASHER	BRASS	NEXCOTE	1		SHEET	1 OF 1		PART NO. 172149RP								
3	CONTACT PIN	BRASS	GOLD	1													
2	INSULATOR	TEFLON	NATURAL	2		CAD FILE	C:/172/172149RP.DWG	DWG. NO.		172149RP.DWG		REV.	A	SIZE	A	SCALE	NA
1	BODY	BRASS	NEXCOTE	1	DO NOT SCALE DRAWING												
	DESCRIPTION	MATERIAL	FINISH	QTY													