


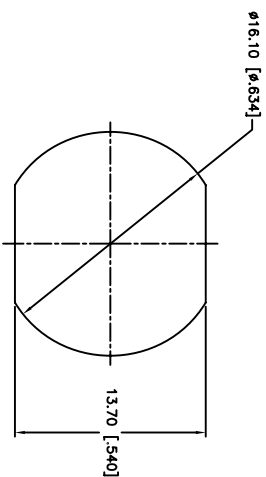


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/12/10	XXXXXX	INITIAL RELEASE

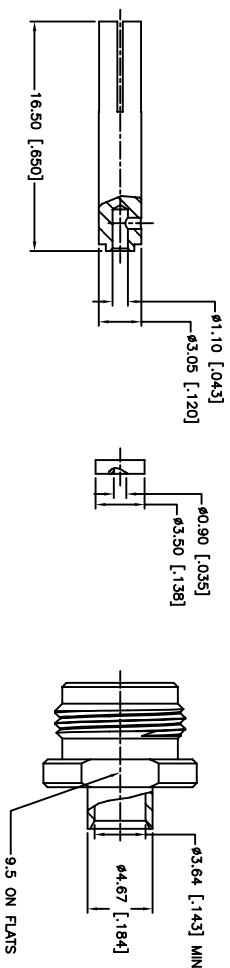

**RECOMMENDED
CABLE STRIPPING DIM'S**

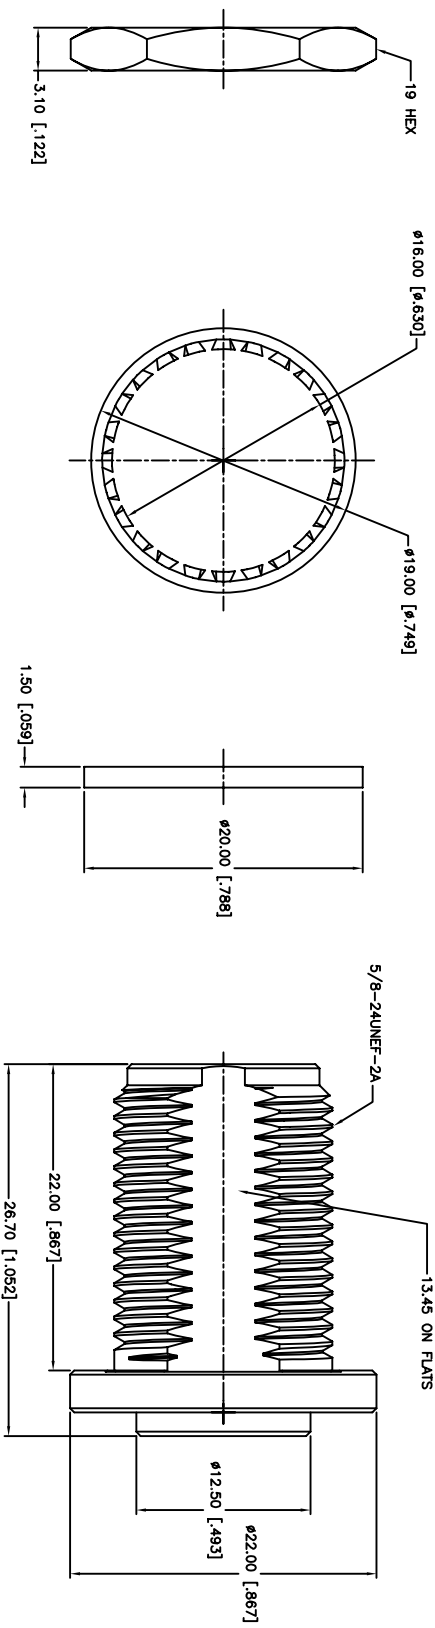

NOTES:
1.HEX CRIMP SIZE .100"
2.MAX PANEL THICKNESS:6.5MM

9	HEX NUT	BRASS	NEXCOTE	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"
8	LOCK WASHER	BRASS	NEXCOTE	1	
7	GASKET	SILICONE	RED	1	
6	SOLDER NUT	BRASS	GOLD	1	
5	INSULATOR	TEFLON	NATURAL	1	
4	CONTACT PIN	PHOS.BRONZE	GOLD	1	
3	INNER BODY	BRASS	NEXCOTE	1	
2	INSULATOR	TEFLON	NATURAL	1	
1	OUT BODY	BRASS	NEXCOTE	1	
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING
					CAD FILE Y:/CONNEX/172137-11.DWG
		APPROVALS	DATE	Amphenol Connex PART DESCRIPTION N BULKHEAD DIRECT SOLDER JACK PART NO. 172137-11 DWG. NO. 172137-11 REV. NC SIZE A SCALE NA	
		DRAWN F.WANG	05/12/10		
		CHECKED			
		ISSUED			
		SHEET 1 OF 1			