




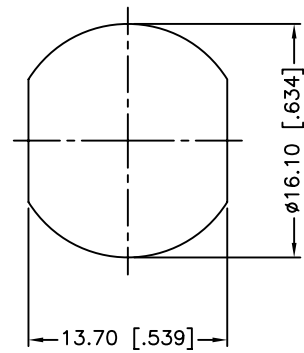

RECOMMENDED
MOUNTING HOLE DIM'S

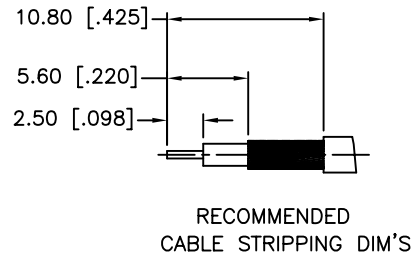

REV.	DATE	ECR NO.	DESCRIPTION
NC	01/19/11	XXXXXX	INITIAL RELEASE

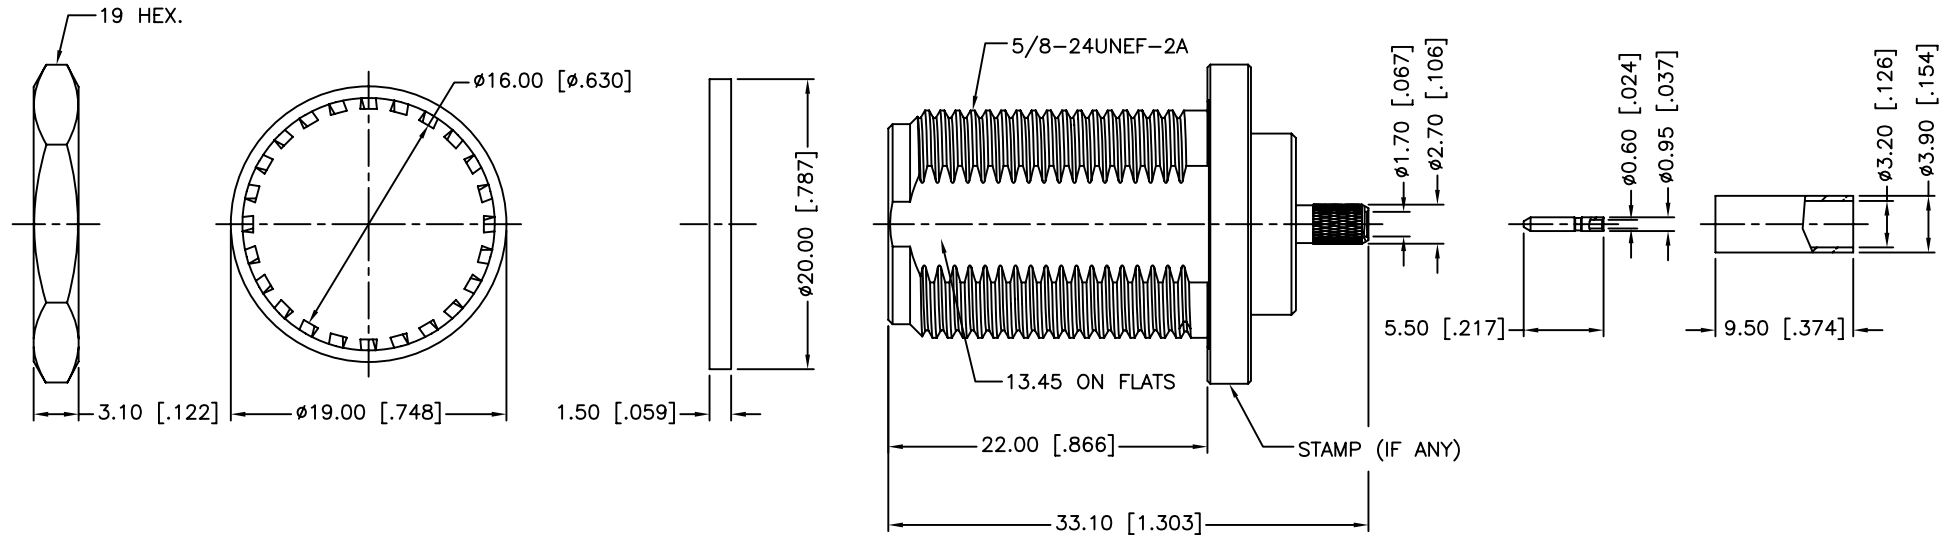

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CRIMPED CONTACT PIN
SQ. CRIMP SIZE 0.7 mm
3. MAX. PANEL THICKNESS=6.5mm

10	FERRULE	BRASS	NEXCOTE	1
9	CONTACT PIN	BRASS	GOLD	1
8	HEX NUT	STAINLESS STEEL	PASSIVATED	1
7	LOCK WASHER	BRASS	NEXCOTE	1
6	GASKET	SILICONE	RED	1
5	BARREL	BRASS	NEXCOTE	1
4	INSULATOR	PTFE	NATURAL	1
3	CONTACT PIN	PHOSPHOR BRONZE	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NEXCOTE	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE
IN MILLIMETERS. DIMENSIONS IN [] ARE IN
INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED
TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	01/19/11
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/172129-11.DWG

Amphenol Connex			
PART DESCRIPTION N BULKHEAD CRIMP JACK, WITH A STAINLESS STEEL HEX NUT (FOR RG-174/U,188A/U,316/U CABLE)			
PART NO. 172129-11			
DWG. NO. 172129-11.DWG	REV. NC	SIZE A	SCALE NA