


REV.	DATE	DESCRIPTION
NC	06/25/06	INITIAL RELEASE

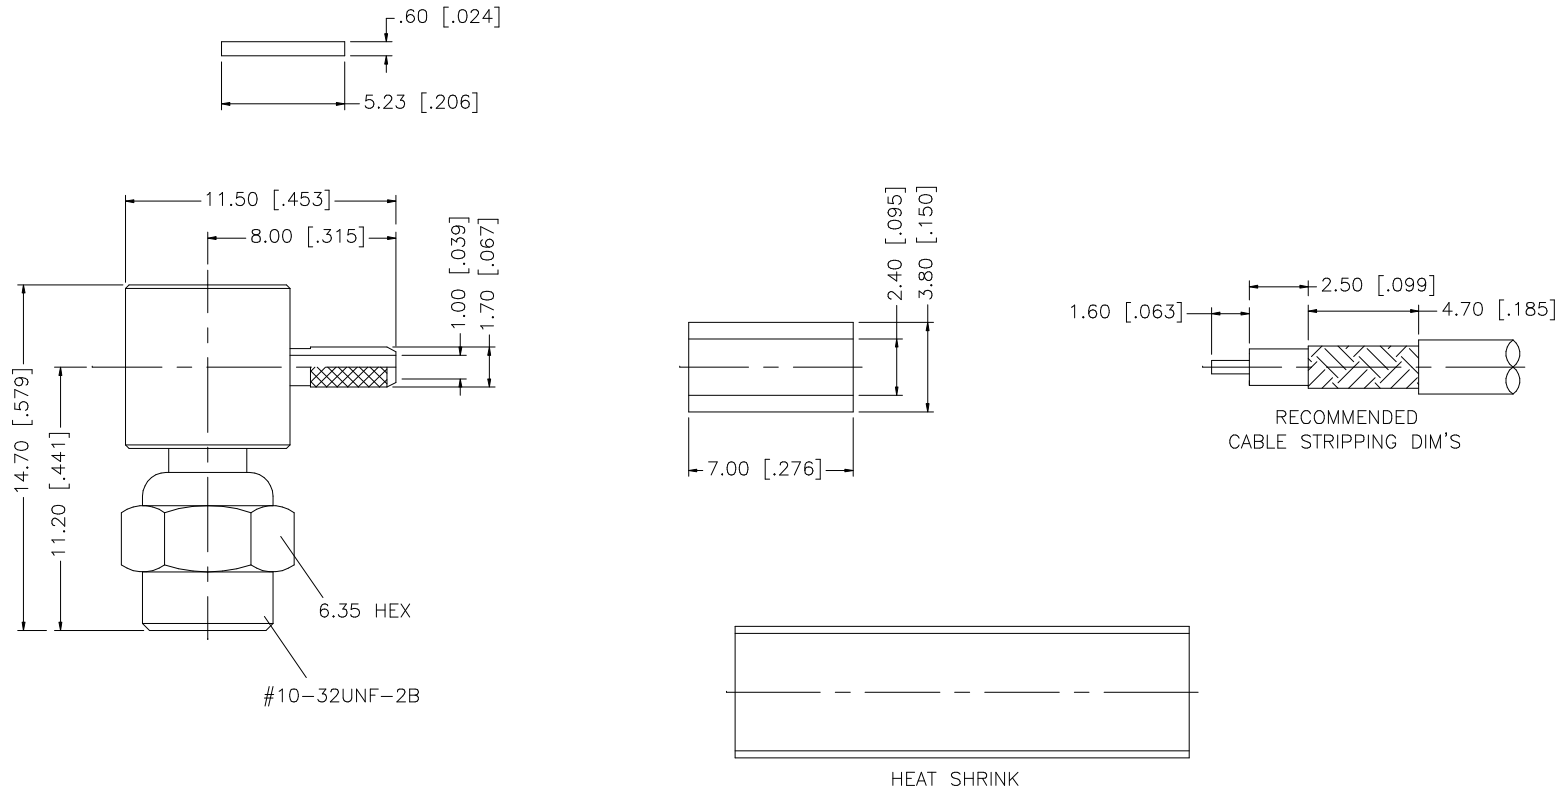

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
 2. CONTACT PIN TO SOLDER

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex					
7						DRAWN	G.R.S.	06/25/06							
6	HEAT SHRINK TUBE			1		CHECKED			PART DESCRIPTION SMC R/A CRIMP PLUG (FOR RG-178B/U, 196A/U CABLE)						
5	FERRULE	COPPER	GOLD	1		ISSUED									
4	COVER	BRASS	GOLD	1		SHEET	1 OF 1			PART NO. 152143					
3	CONTACT PIN	BER. COPPER	GOLD	1											
2	INSULATOR	TEFLON	NATURAL	1					DWG. NO. 152143.DWG REV. NC SIZE A SCALE NA						
1	BODY	BRASS	GOLD	1											
	DESCRIPTION	MATERIAL	FINISH	QTY				CAD FILE C:/152/152143.DWG							