


REV.	DATE	DESCRIPTION
NC	11/22/04	INITIAL RELEASE

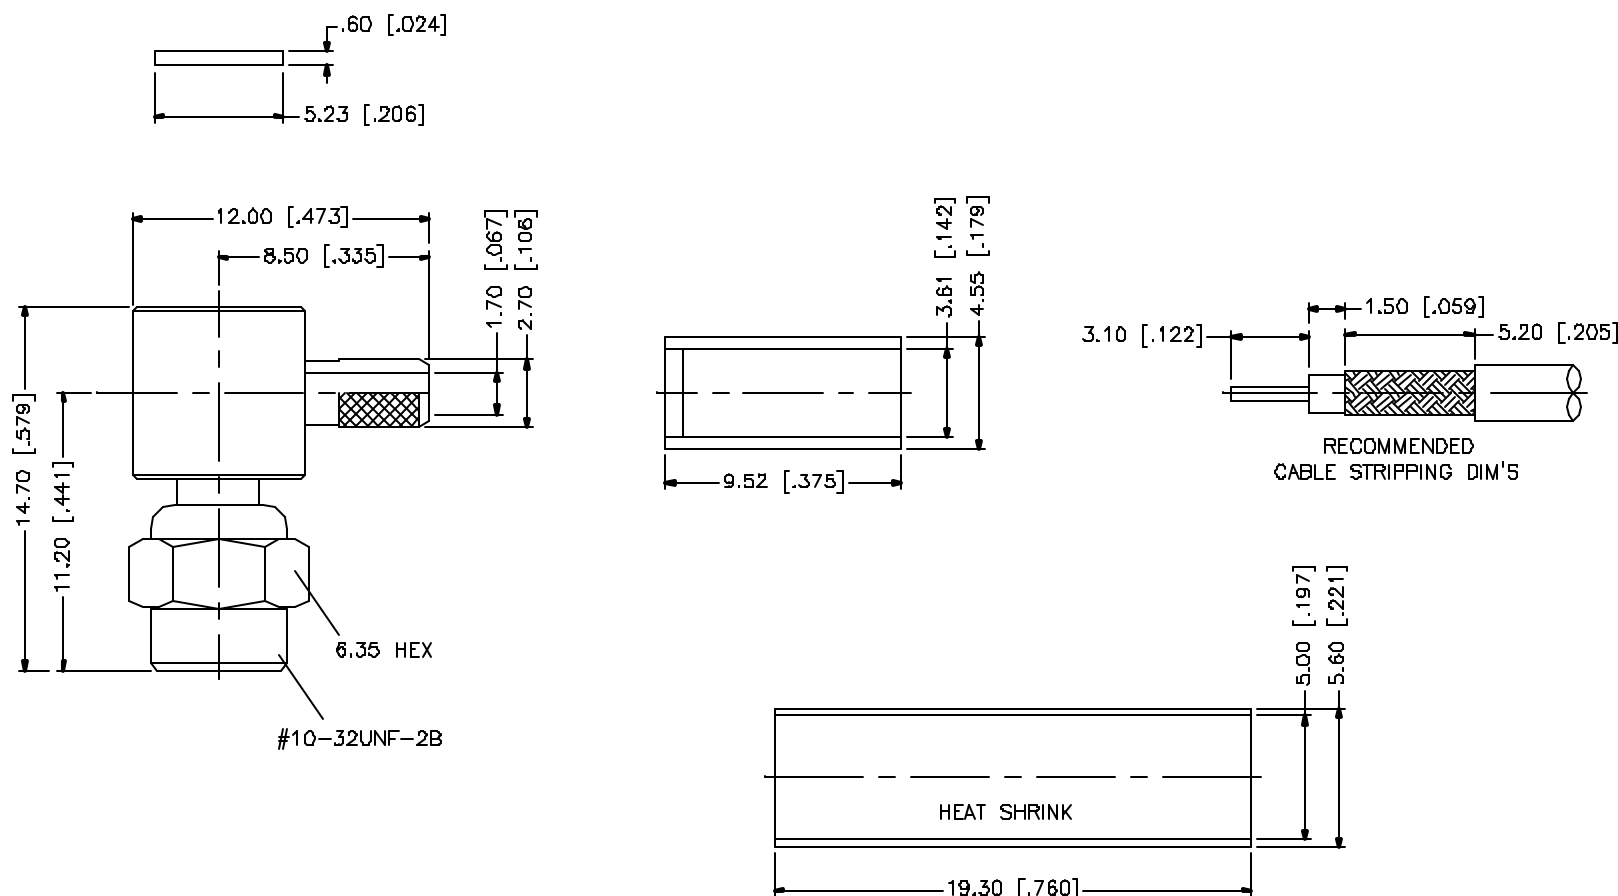

NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex							
8					DRAWN	G.R.S.	11/22/04									
7					CHECKED				PART DESCRIPTION SMC R/A CRIMP PLUG (FOR RG-316/U DOUBLE BRAID CABLE)							
6	HEAT SHRINK TUBE		1		ISSUED											
5	FERRULE	COPPER	GOLD		1	SHEET	1 OF 1		PART NO. 152142							
4	COVER	BRASS	GOLD		1											
3	CONTACT PIN	BER. COPPER	GOLD		1	CAD FILE	C:/152/152142.DWG		DWG. NO.	152142.DWG	REV.	NC	SIZE	A	SCALE	NA
2	INSULATOR	TEFLON	NATURAL		1											
1	BODY	BRASS	GOLD	1												
	DESCRIPTION	MATERIAL	FINISH	QTY												