

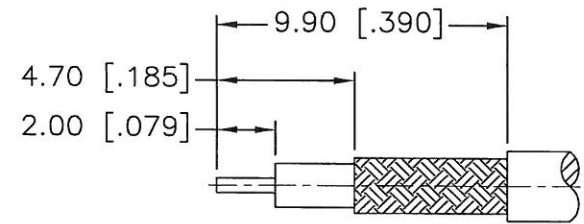
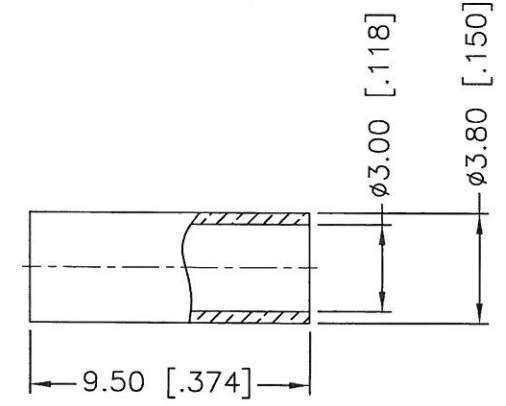
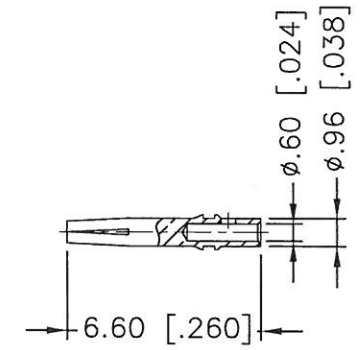


REV.	DATE	ECR NO.	DESCRIPTION
NC	12/29/10	XXXXXX	INITIAL RELEASE

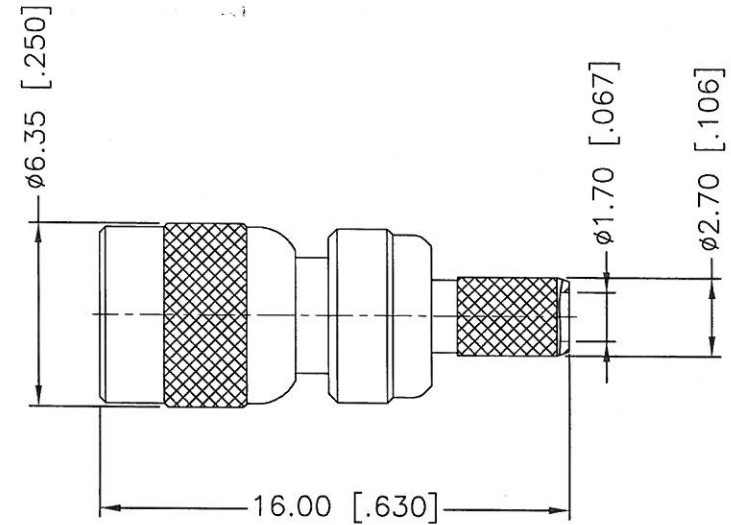

RECOMMENDED
CABLE STRIPPING DIM'S

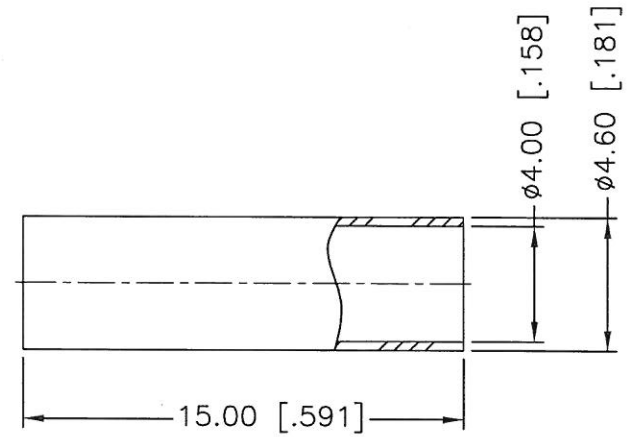

- NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
 2. CONTACT PIN TO SOLDER

8	HEAT SHRINK TUBING			1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex						
7	FERRULE	COPPER	GOLD	1		DRAWN	S.LI						12/29/10'	
6	CONTACT PIN	BERYLLIUM COPPER	GOLD	1		CHECKED								
5	BARREL	BRASS	GOLD	1		ISSUED			PART DESCRIPTION SMC CRIMP PLUG (FOR RG-174/U, 188A/U, 316/U)					
4	INSULATOR	PTFE	NATURAL	1		SHEET	1 OF 1							
3	INSULATOR	PTFE	NATURAL	1					PART NO. 152101-11					
2	BODY	BRASS	GOLD	1					DWG. NO. 152101-11.DWG					
1	SHELL	BRASS	GOLD	1					REV.	NC	SIZE	A	SCALE	NA
DESCRIPTION						MATERIAL	FINISH	QTY						