
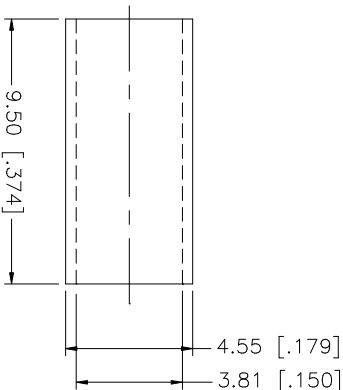
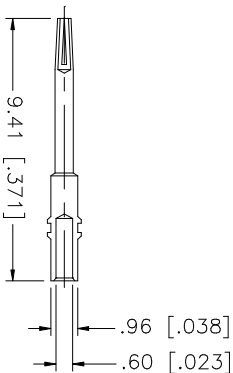
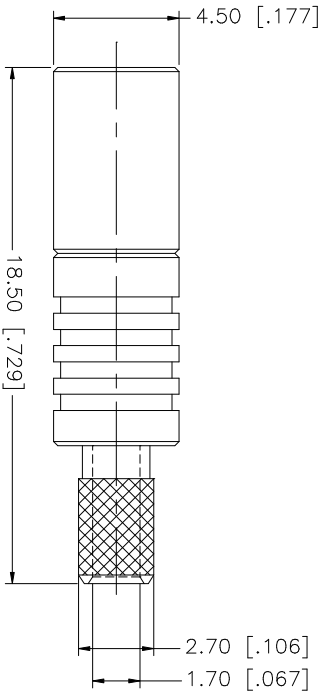


REV.	DATE	DESCRIPTION
NC	01/08/03	INITIAL RELEASE

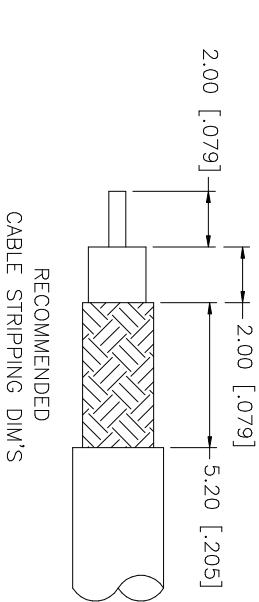

NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CENTER CONTACT TO SOLDER

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"				APPROVALS DRAWN G.R.S. 01/08/03		DATE 01/08/03	
CHECKED ISSUED				PART DESCRIPTION SSMB CRIMP PLUG (FOR RG-316/U DOUBLE BRAID CABLE)		PART NO. 143100	
SHEET 1 OF 1				CAD FILE C:/143/143100.DWG		DWG. NO. 143100.DWG	
DO NOT SCALE DRAWING				REV. NC		SIZE A	

4	FERRULE	COPPER	GOLD	1
3	INSULATOR	TEFLON	NATURAL	1
2	CONTACT PIN	BER. COPPER	GOLD	1
1	HOUSING/BODY	BRASS	GOLD	1
DESCRIPTION MATERIAL FINISH QTY				