

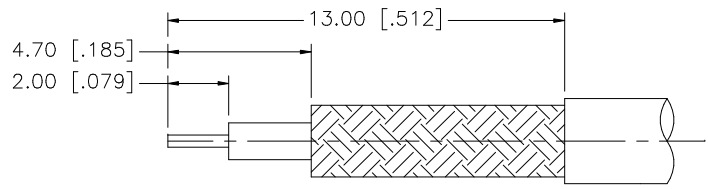
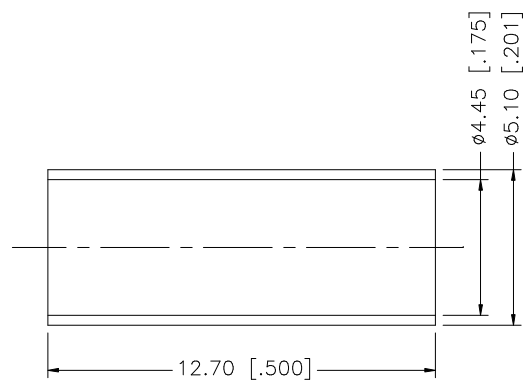


REV.	DATE	DESCRIPTION
NC	01/17/06	INITIAL RELEASE



RECOMMENDED
CABLE STRIPPING DIM'S

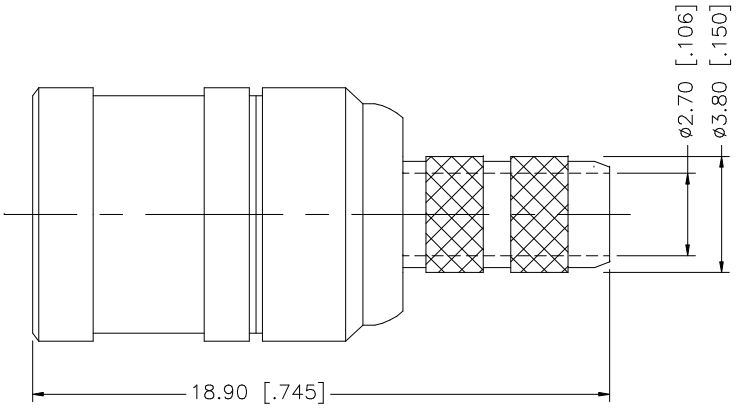

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .178"
 2. CONTACT PIN TO SOLDER

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex					
7						DRAWN	G.R.S.						01/17/06
6						CHECKED			PART DESCRIPTION MINI 75ohm SMB CRIMP PLUG (FOR RG-180/U CABLE)				
5						ISSUED							
4	FERRULE	COPPER	GOLD	1		SHEET	1 OF 1		PART NO. 142339-75				
3	CONTACT PIN	BER. COPPER	GOLD	1									
2	INSULATOR	TEFLON	NATURAL	1				DWG. NO. 142339-75.DWG REV. NC SIZE A SCALE NA					
1	BODY	BRASS	GOLD	1									
	DESCRIPTION	MATERIAL	FINISH	QTY									