

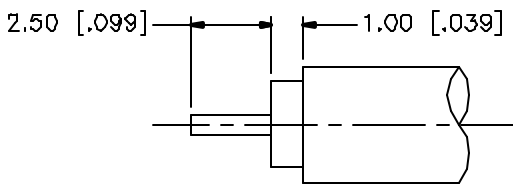


REV.	DATE	DESCRIPTION
NC	01/09/05	INITIAL RELEASE

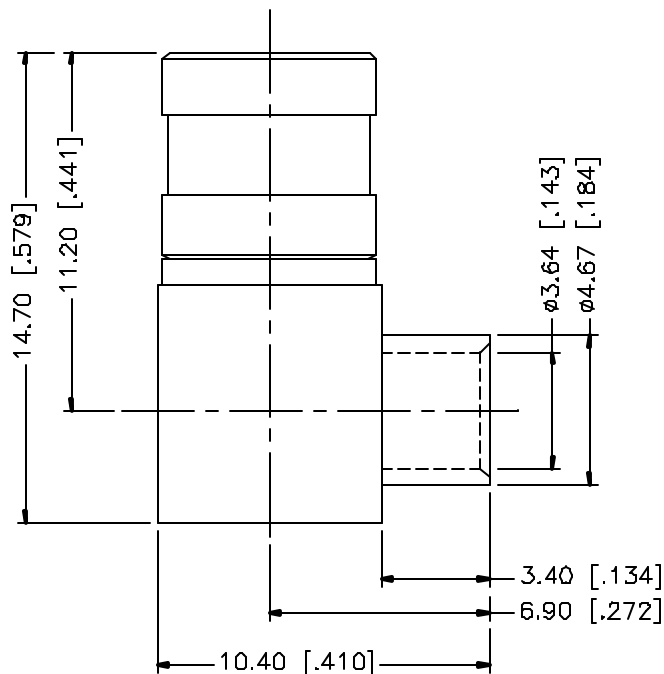

RECOMMENDED CABLE
STRIPPING DIMENSIONS

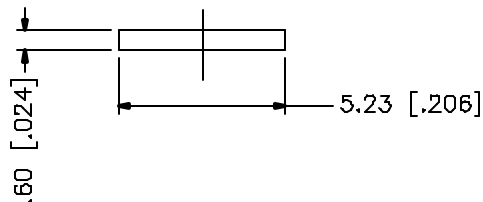

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.1 - 3mm ± 0.20mm 3 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex					
7						DRAWN	G.R.S.						01/09/05
6						CHECKED			PART DESCRIPTION SMB R/A DIRECT SOLDER PLUG (FOR .141" SEMI-RIGID CABLE)				
5						ISSUED							
4	COVER	BRASS	GOLD	1		SHEET	1 OF 1		PART NO. 142329				
3	CONTACT PIN	BER. COPPER	GOLD	1									
2	INSULATOR	TEFLON	NATURAL	1				DWG. NO. 142329.DWG					
1	BODY	BRASS	GOLD	1									
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE	C:/142/142329.DWG	REV.	NC	SIZE	A	SCALE	NA