


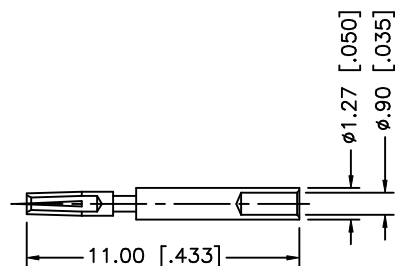
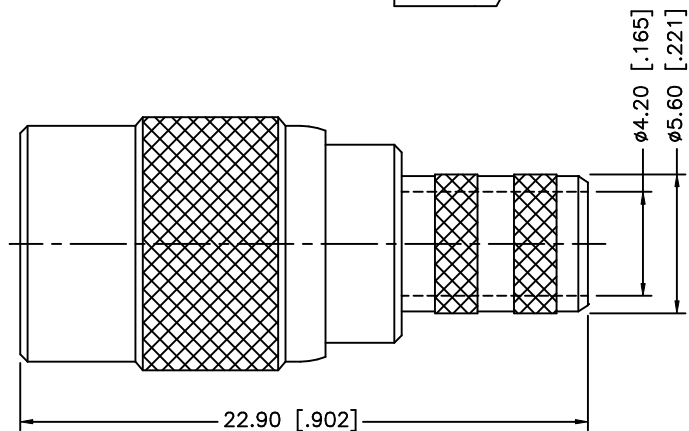


REV.	DATE	DESCRIPTION
NC	04/17/02	INITIAL RELEASE

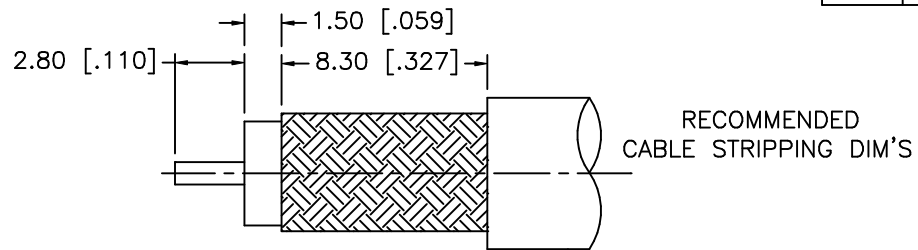

CRIMP NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. SOLDER CENTER CONTACT

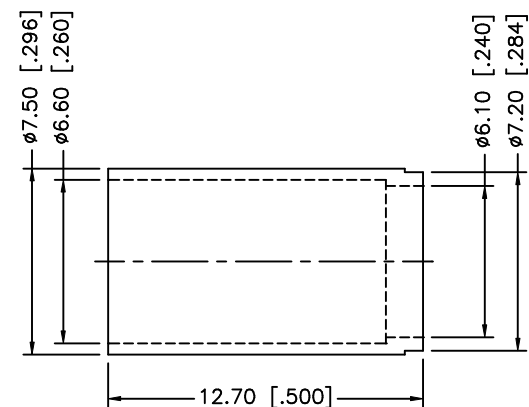

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE	Amphenol - Connex CONNECTOR CORPORATION					
8					DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY	DRAWN					G.R.S.	04/17/02
7						CHECKED						
6						ISSUED						
5												
4	FERRULE	COPPER	NICKEL	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .XXX = ± 0.005" .XX = ± 0.010" .X = ± 0.020"			TITLE SMZ POSITION LOCK CRIMP PLUG (FOR AT&T 734A CABLE)					
3	CONTACT PIN	BER. COPPER	GOLD									
2	INSULATOR	TEFLON	NATURAL									
1	BODY	BRASS	NICKEL									
	DESCRIPTION	MATERIAL	FINISH	DO NOT SCALE DRAWING			SIZE	FSCM NO.	DWG. NO.	REV.		
							A	99001	142316.DWG	NC		
							SCALE	PART NO.	SHEET			
							NA	142316	1 OF 1			