

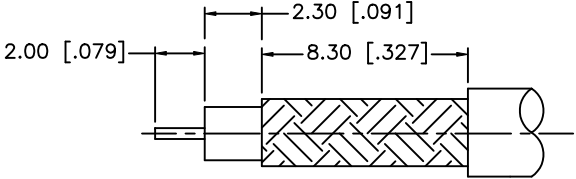
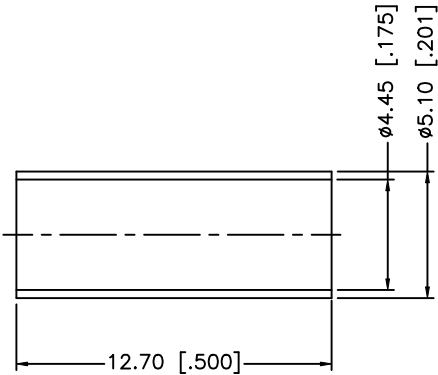


REV.	DATE	ECR NO.	DESCRIPTION
NC	07/18/00	—	INITIAL RELEASE
A	11/02/08	—	UPDATE DRAWING FORMAT

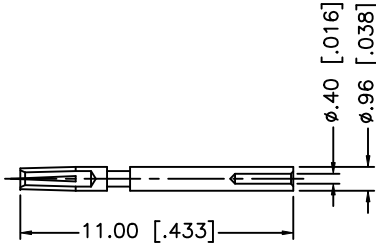

RECOMMENDED
CABLE STRIPPING DIM'S

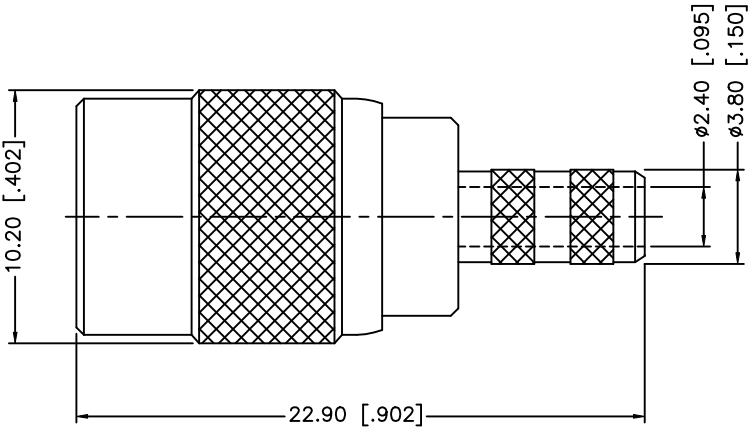

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .178" [4.52]
2. CONTACT PIN TO SOLDER.

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex					
8					DRAWN	GRS	11/02/08							
7					CHECKED					PART DESCRIPTION SMB POSITION LOCK CRIMP PLUG (FOR RG-180R/U, 195/U CABLE)				
6					ISSUED									
5					SHEET	1 OF 1								
4	FERRULE	COPPER	NICKEL	1					PART NO. 142291					
3	CONTACT PIN	BER. COPPER	GOLD	1										
2	INSULATOR	PTFE	NATURAL	1					DWG. NO. 142291.DWG					
1	BODY	BRASS	NICKEL	1										
DESCRIPTION				MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		CAD FILE C:/142/142291.DWG		REV. A	SIZE A	SCALE NA	