

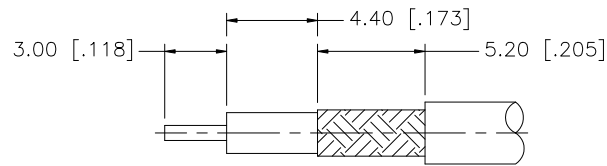



REV.	DATE	ECR NO.	DESCRIPTION
NC	03/07/00	—	INITIAL RELEASE
A	03/07/00	—	UPDATE DRAWING FORMAT
B	04/10/08	10003	REVISE FERRULE LENGTH TO 9.5mm

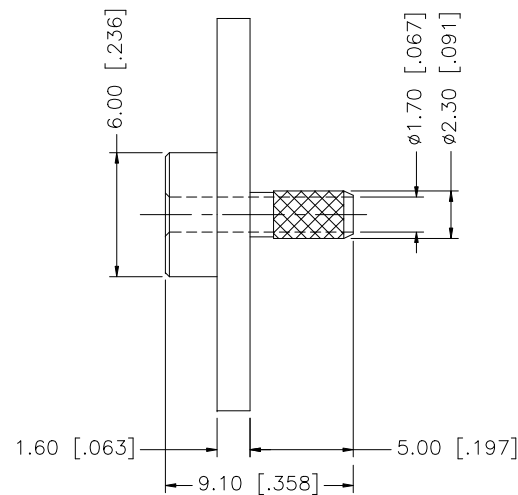

RECOMMENDED
CABLE STRIPPING DIMS.

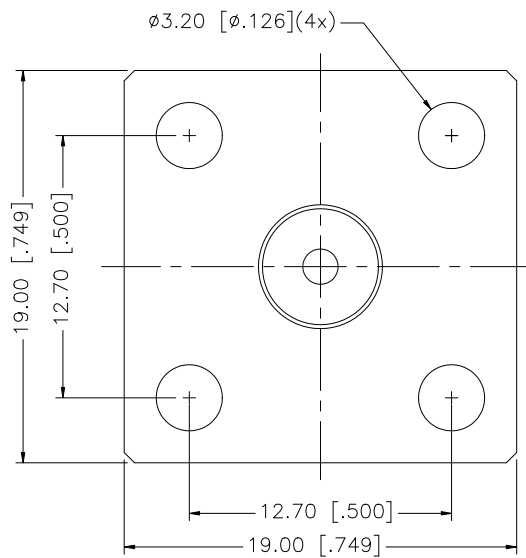

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS; DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex										
8						DRAWN	G.R.S.	04/10/08												
7						CHECKED														
6						ISSUED				PART DESCRIPTION PANEL MOUNT CABLE TERMINATION (FOR RG-174/U, 188A/U, 316/U CABLE)										
5						SHEET	1 OF 1													
4											PART NO. 142280									
3	FERRULE	BRASS	NICKEL	1	CAD FILE C:/142/142280.DWG						DWG. NO.		142280.DWG		REV.	B	SIZE	A	SCALE	NA
2	FLANGE	BRASS	NICKEL	1	DO NOT SCALE DRAWING															
1	BODY	BRASS	NICKEL	1																
DESCRIPTION					MATERIAL		FINISH		QTY											