

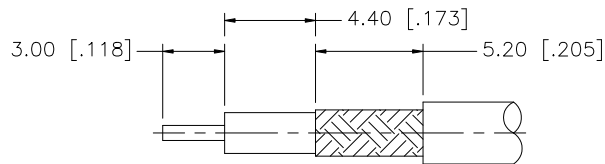



REV.	DATE	DESCRIPTION
NC	03/07/00	INITIAL RELEASE
A	11/20/07	UPDATE DRAWING FORMAT

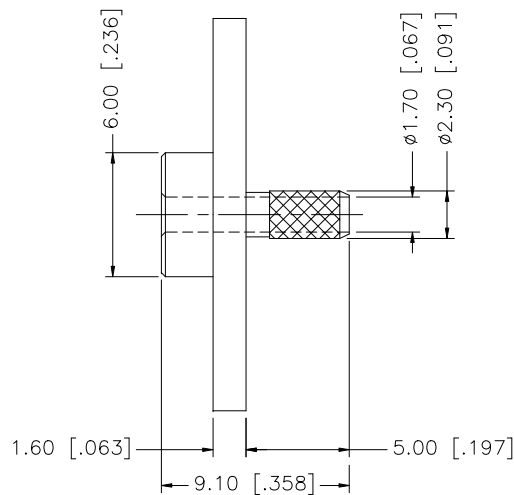

RECOMMENDED
CABLE STRIPPING DIMS.

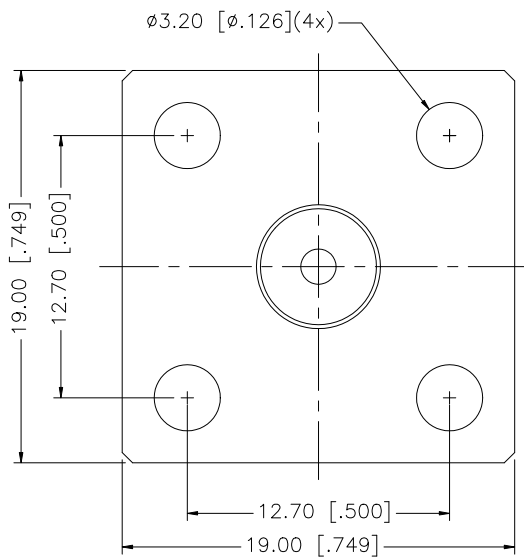

NOTES:
1. CRIMPED FERRULE HEX CRIMP SIZE .128"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS; DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex					
8						DRAWN	G.R.S.	11/20/07	PART DESCRIPTION PANEL MOUNT CABLE TERMINATION (FOR RG-316/U, DOUBLE BRAID CABLE)				
7						CHECKED							
6						ISSUED							
5						SHEET	1 OF 1						
4									PART NO. 142281				
3	FERRULE	BRASS	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”								
2	FLANGE	BRASS	NICKEL	1					DWG. NO. 142281.DWG				
1	BODY	BRASS	NICKEL	1					REV. A				
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE C:/142/142281.DWG			SIZE A		SCALE NA		