






REV.	DATE	DESCRIPTION
NC	02/20/00	INITIAL RELEASE
A	04/02/08	UPDATE DRAWING FORMAT

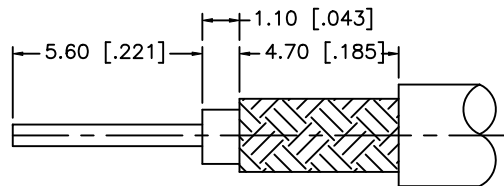

RECOMMENDED
CABLE STRIPPING DIMS

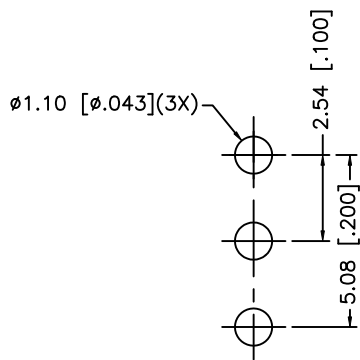

RECOMMENDED
MOUNTING HOLE

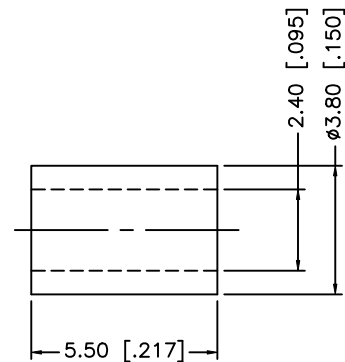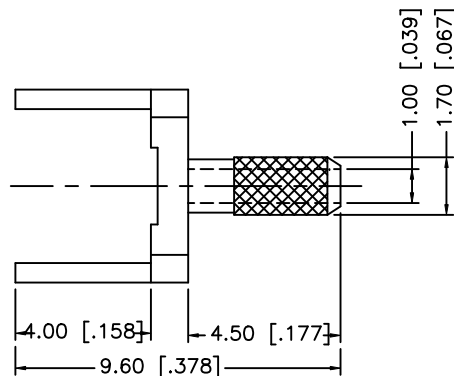

NOTES:
1. CRIMPED FERRULE HEX CRIMP SIZE .128"

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS	DATE	Amphenol Connex						
8						DRAWN	G.R.S.	04/02/08	PART DESCRIPTION PCB MOUNT CABLE TERMINATION (FOR RG-178B/U, 196A/U CABLE)					
7						CHECKED								
6						ISSUED								
5						SHEET	1 OF 1							
4									PART NO. 142261					
3														
2	FERRULE	COPPER	GOLD	1	.020 - .315 = ± 0.007"	CAD FILE C:/142/142261.DWG			DWG. NO. 142261.DWG					
1	BODY	BRASS	GOLD	1	.315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"									
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING				REV.	A	SIZE	A	SCALE	NA