





REV.	DATE	DESCRIPTION
NC	04/29/99	INITIAL RELEASE



RECOMMENDED
MOUNTING HOLE

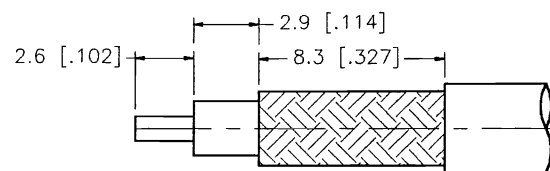

RECOMMENDED CABLE
STRIPPING DIM'S

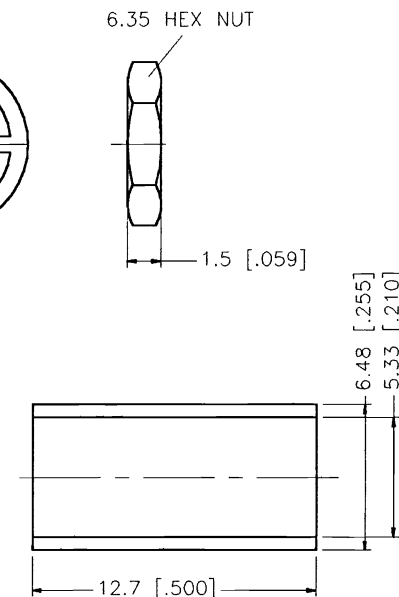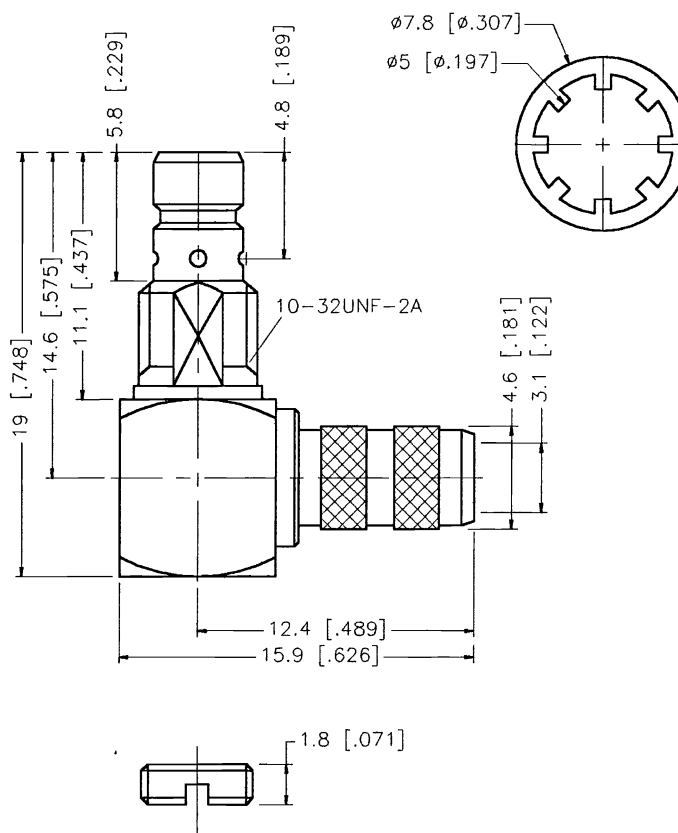

DESCRIPTION	MATERIAL	FINISH	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS	APPROVALS	DATE				
1 BODY/BARREL	BRASS	GOLD	DIMENSIONS IN [] ARE IN INCHES FOR CUSTOMER REFERENCE ONLY UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5-6 = ± 0.2 6-30 = ± 0.4 30-120 = ± 0.6 120-315 = ± 1 315-1000 = ± 1.6 1000-2000 = ± 2.4	DRAWN G.R.S.	04/29/99				
2 INSULATOR	TEFLON	NATURAL		CHECKED		TITLE SMB R/A BULKHEAD CRIMP JACK (FOR RG-58C/u, 58/u CABLE)			
3 CONTACT PIN	BRASS	GOLD		ISSUED		SIZE A	FSCM NO. 99001	DWG. NO. 142237.DWG	REV. NC
4 FERRULE	COPPER	GOLD				SCALE NA	PART NO. 142237	SHEET 1 OF 1	
5									
6									
7									
8			DO NOT SCALE DRAWING						