

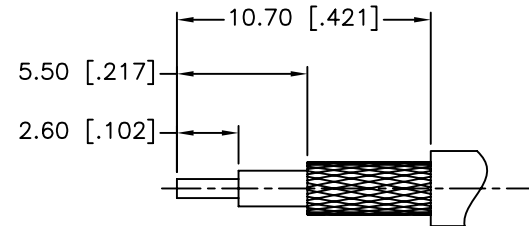




REV.	DATE	ECR NO.	DESCRIPTION
NC	04/29/99	XXXXXX	INITIAL RELEASE
A	05/08/07	XXXXXX	REVISE BARREL, FERRULE DIMS, UPDATE DRAWING FORMAT
B	03/08/11	2148	CHANGE THE FERRULE LENGTH TO 9.52MM FROM 7MM

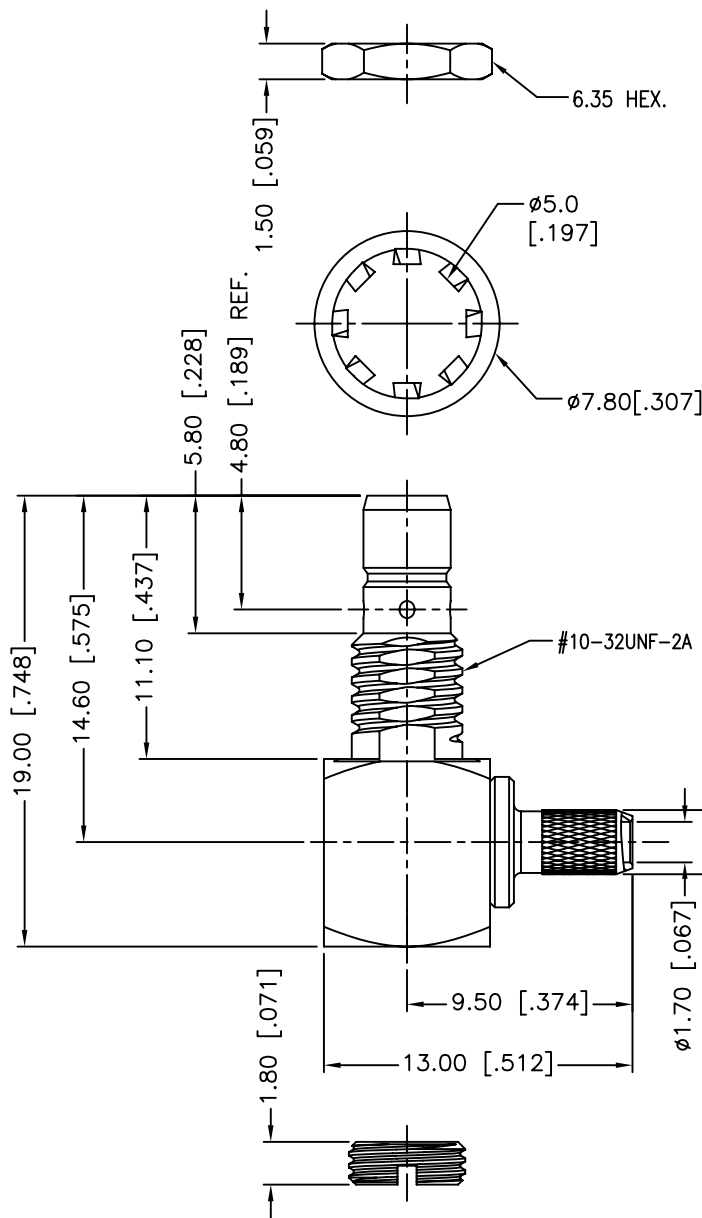

RECOMMENDED
CABLE STRIPPING DIM'S

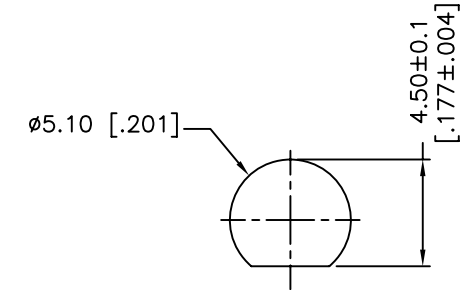

RECOMMENDED
MOUNTING HOLE

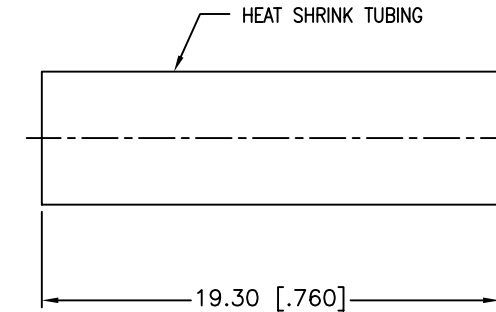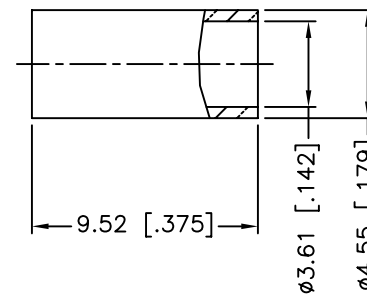

1. CRIMPED FERRULE
HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER

QTY	FINISH	MATERIAL	DESCRIPTION
1	GOLD	BRASS	BODY WITH BARREL
2	NATURAL	PTFE	INSULATOR
1	GOLD	BRASS	CONTACT PIN
1	GOLD	BRASS	FERRULE
1	GOLD	BRASS	COVER
1	GOLD	BRASS	LOCK WASHER
1	GOLD	BRASS	HEX NUT
1	BLACK	HEAT SHRINK TUBING	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	03/08/11
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/142235.DWG

Amphenol Connex			
PART DESCRIPTION			
SMB R/A BULKHEAD CRIMP JACK (FOR RG-316U/D CABLE)			
PART NO.			
142235			
DWG. NO.	142235.DWG	REV.	B
SIZE	A	SCALE	NA