

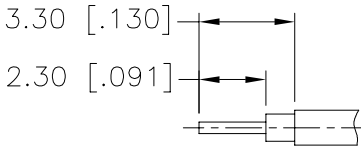



REV.	DATE	ECR NO.	DESCRIPTION
NC	08/20/09	XXXXXX	INITIAL RELEASE

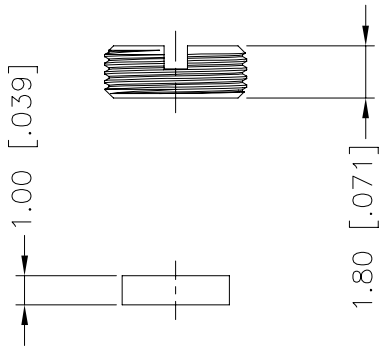

RECOMMENDED
CABLE STRIPPING DIM'S



SCALE 3.000

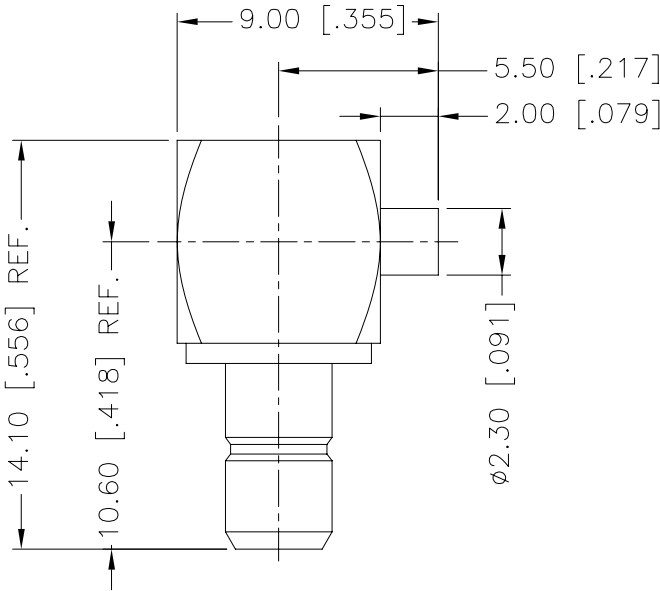

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex						
						DRAWN	SUSAN	08/20/09								
						CHECKED										
6	COVER	BRASS	GOLD	1			ISSUED				PART DESCRIPTION SMB R/A DIRECT SOLDER PLUG (FOR .047 CABLE)					
5	INSULATOR	PE	NATURAL	1			SHEET	1 OF 1								
4	CONTACT PIN	BRASS	GOLD	1								PART NO. 142226				
3	HOUSING	BRASS	GOLD	1												
2	INSULATOR	PTFE	NATURAL	1								DWG. NO. 142226.DWG				
1	BODY	BRASS	GOLD	1												
	DESCRIPTION	MATERIAL	FINISH	QTY			C:/CONNEX/142226.DWG					REV.	NC	SIZE	A	SCALE