

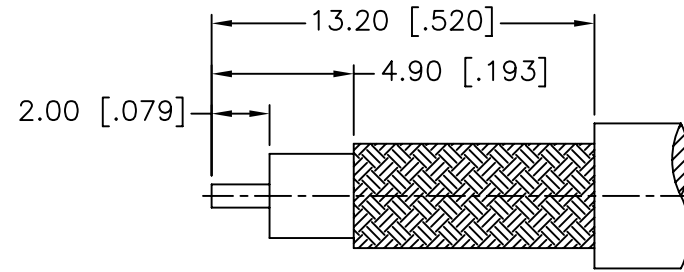
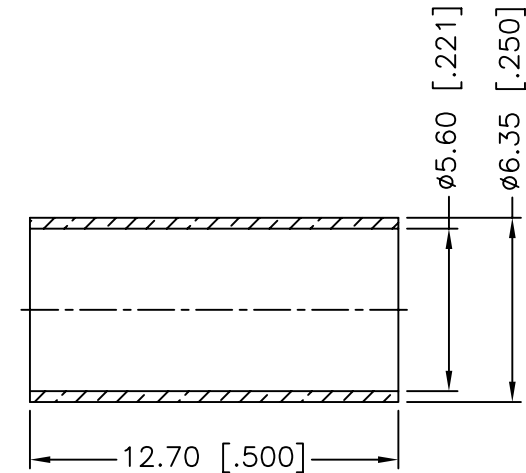


REV.	DATE	ECR NO.	DESCRIPTION
NC	10/22/10	XXXXXX	INITIAL RELEASE
A	09/26/11	2231	CONTACT WAS CHANGED AND ADD NOTES

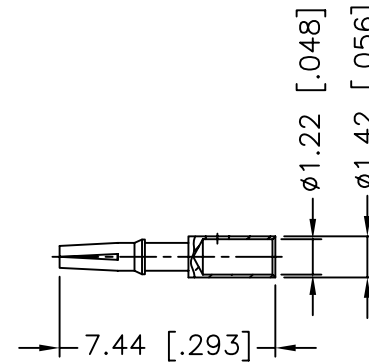

RECOMMENDED
CABLE STRIPPING DIM'S

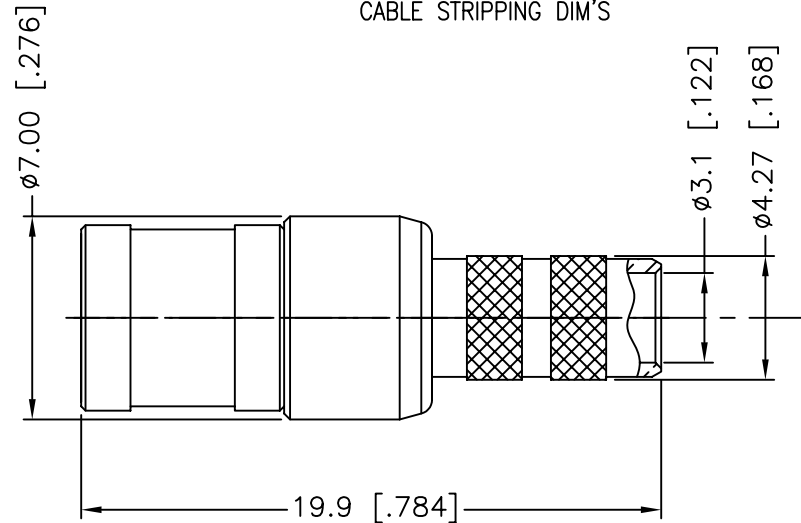

NOTE:

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0-4 GHZ
3. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
4. DURABILITY: 500 CYCLES MIN.
5. CRIMPED FERRULE
HEX CRIMP SIZE .213
6. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS	DATE	Amphenol Connex				
						DRAWN S.LI	09/22/11					
						CHECKED		PART DESCRIPTION				
						ISSUED		SMB CRIMP PLUG FOR RG-142A/U,223/U, 400/U WITH 18AWG CONTACT				
4	FERRULE	BRASS	GOLD	1			SHEET 1 OF 1		PART NO. 142220-10			
3	CONTACT PIN	BER.COPPER	GOLD	1				DWG. NO. 142220-10.DWG				
2	INSULATOR	PTFE	NATURAL	1				REV. A				
1	BODY	BRASS	GOLD	1				SIZE A				
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING			SCALE NA				