

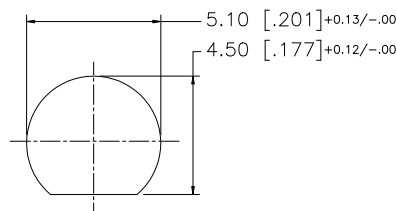
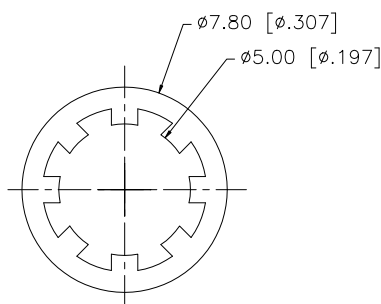




REV.	DATE	ECR NO.	DESCRIPTION
NC	11/15/96	—	INITIAL RELEASE
A	05/08/07	—	UPDATE DRAWING FORMAT
B	05/24/08	—	ADD PANEL THICKNESS NOTE NO.3

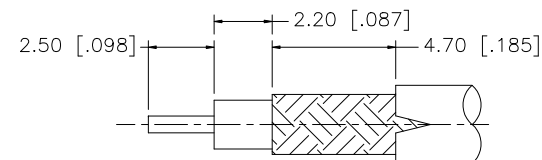

RECOMMENDED
MOUNTING HOLE

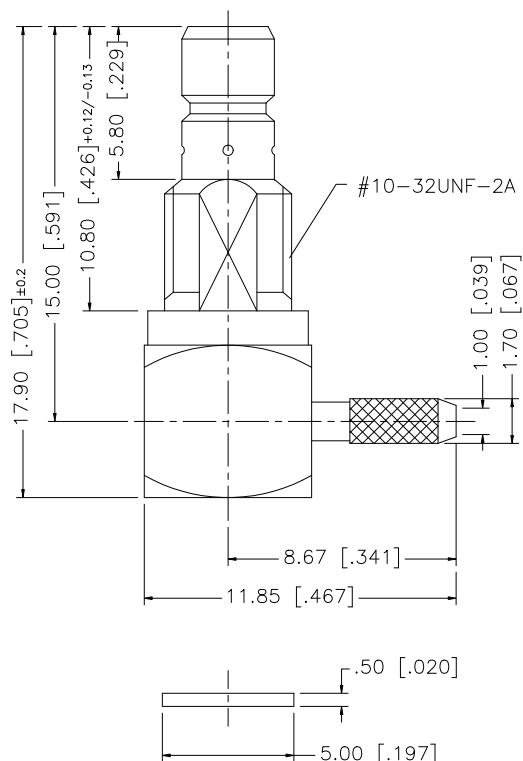

RECOMMENDED
CABLE STRIPPING DIM'S



NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER.
3. MAX. PANEL THICKNESS = 2.3mm [.090"]

				UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex								
8					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	DRAWN	G.R.S.	05/24/08	PART DESCRIPTION SMB R/A BULKHEAD CRIMP JACK (FOR RG–178/U, 196/U CABLE)									
7	COVER	BRASS	NICKEL	1		CHECKED												
6	FERRULE	COPPER	NICKEL	1		ISSUED												
5	HEX NUT	BRASS	NICKEL	1		SHEET	1	OF 1	PART NO. 142196									
4	LOCK WASHER	BRASS	NICKEL	1														
3	CONTACT PIN	BRASS	GOLD	1	DO NOT SCALE DRAWING					DWG. NO. 142196.DWG								
2	INSULATOR	TEFLON	NATURAL	1														
1	BODY	BRASS	NICKEL	1							REV. B	SIZE A	SCALE NA					
	DESCRIPTION	MATERIAL	FINISH	QTY			CAD FILE C:/142/142196.DWG											