
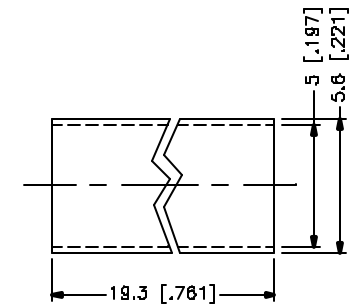
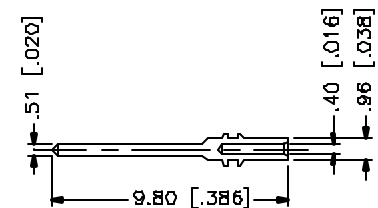
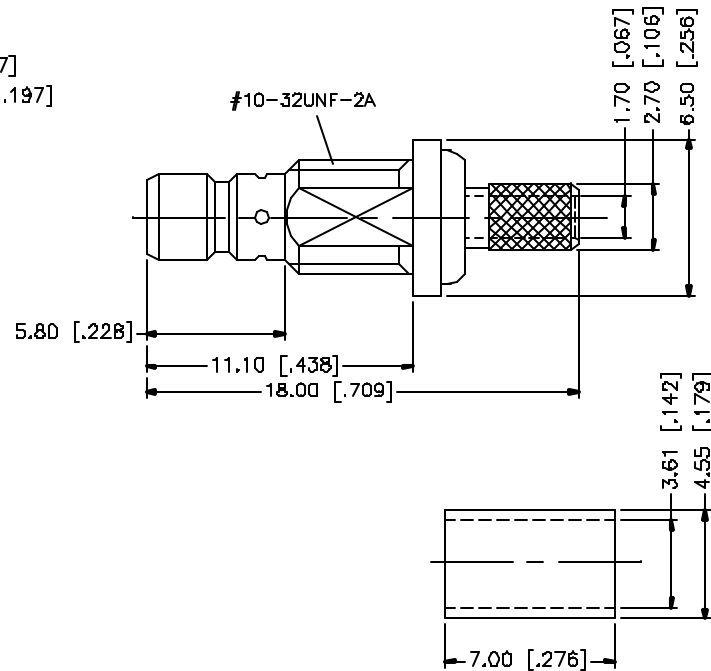

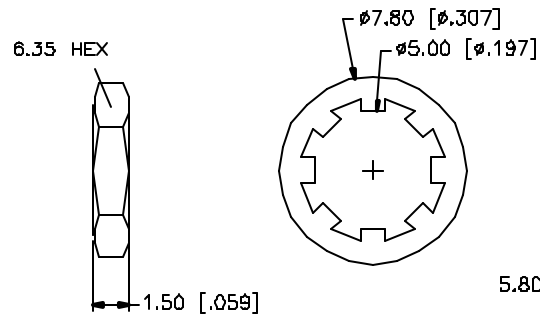


REV.	DATE	DESCRIPTION
NC	08/27/04	INITIAL RELEASE

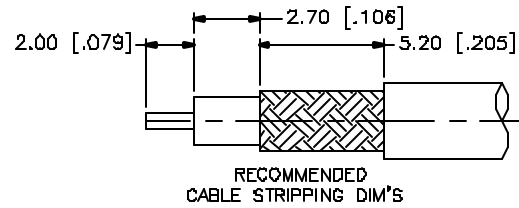

						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex									
8						UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm		DRAWN		G.R.S.						08/27/04					
7	HEAT SHRINK TUBE				1			CHECKED													
6	HEX NUT	BRASS	GOLD	1				ISSUED													
5	LOCK WASHER	BRASS	GOLD	1				SHEET		1 OF 1				PART DESCRIPTION							
4	FERRULE	COPPER	GOLD	1										SMB MINI 75ohm BULKHEAD CRIMP JACK (FOR RG-179 BOUBLE BRAID CABLE)							
3	CONTACT PIN	BRASS	GOLD	1										PART NO.							
2	INSULATOR	TEFLON	NATURAL	1										142192-75							
1	BODY	BRASS	GOLD	1																	
DESCRIPTION		MATERIAL	FINISH	QTY			DO NOT SCALE DRAWING		CAD FILE		C:/142/142192-75.DWG		DWG NO.		142192-75.DWG	REV.	NC	SIZE	A	SCALE	NA