

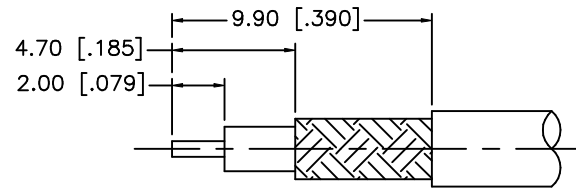
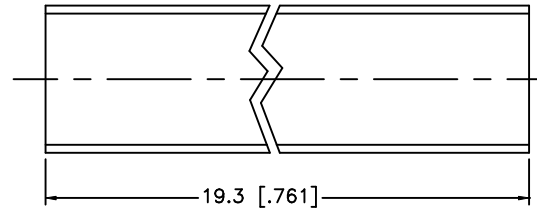
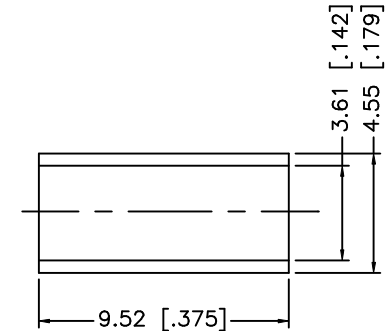


REV.	DATE	DESCRIPTION
NC	05/08/07	INITIAL RELEASE

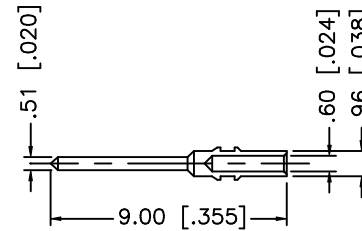

RECOMMENDED
CABLE STRIPPING DIM'S

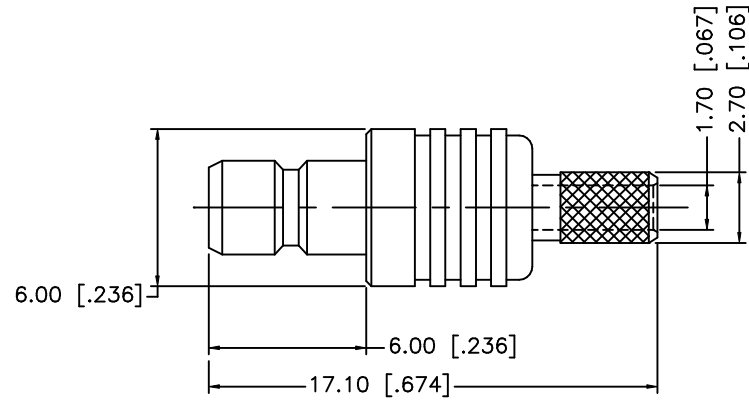

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .151"
2. CRIMPED CONTACT PIN SQ. CRIMP SIZE 0.7mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS		DATE		Amphenol Connex					
8						DRAWN	G.R.S.	05/08/07							
7						CHECKED									
6						ISSUED				PART DESCRIPTION SMB MINI 75ohm CRIMP JACK (FOR RG-316U/D CABLE)					
5	HEAT SHRINK TUBE			1		SHEET	1 OF 1								
4	FERRULE	COPPER	NICKEL	1						PART NO. 142182-75					
3	CONTACT PIN	BRASS	GOLD	1											
2	INSULATOR	TEFLON	NATURAL	1						DWG. NO. 142182-75.DWG					
1	BODY	BRASS	NICKEL	1											
					CAD FILE C:/142/142182-75.DWG					REV. NC		SIZE A		SCALE NA	
					DO NOT SCALE DRAWING										