
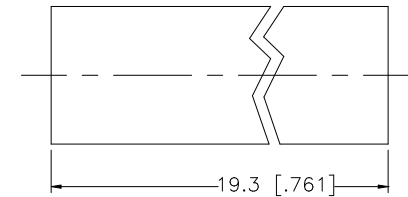
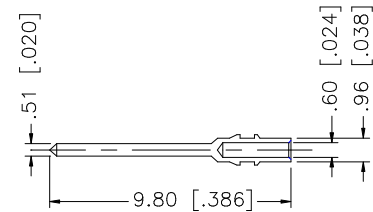
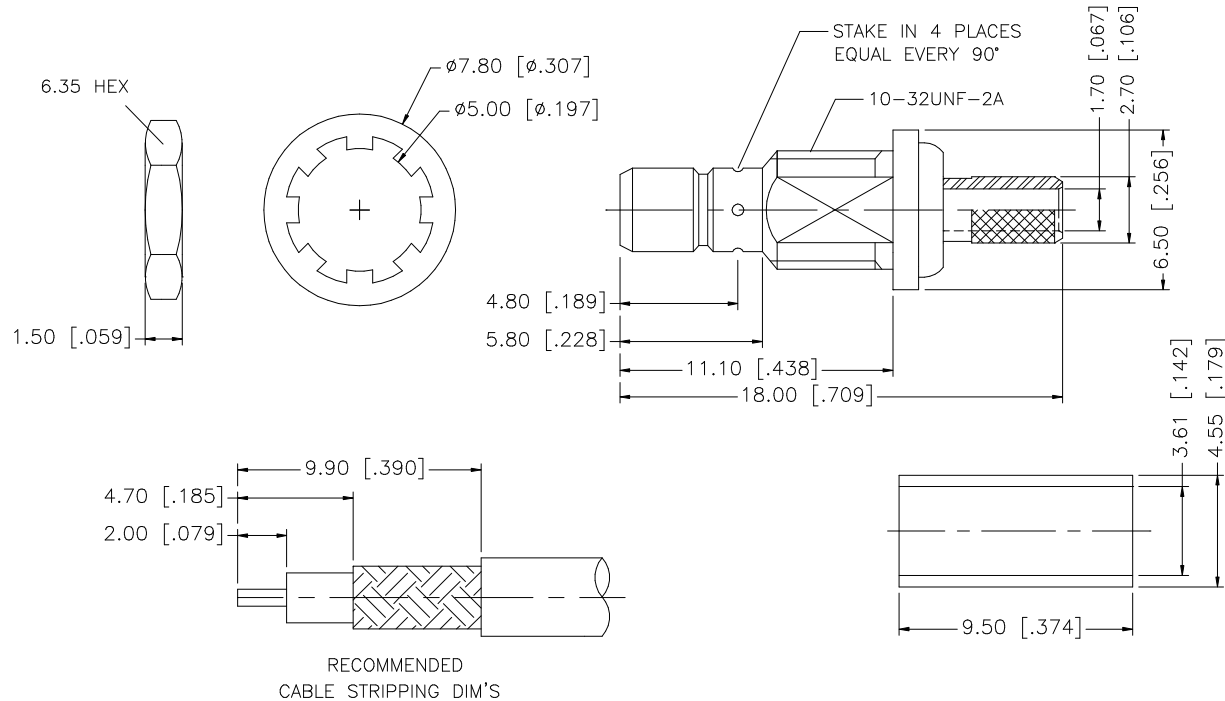


REV.	DATE	DESCRIPTION
NC	05/06/07	INITIAL RELEASE



NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CRIMPED CONTACT PIN SQ. CRIMP SIZE 0.7mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
8						DRAWN	G.R.S.							05/06/07	
7	HEAT SHRINK TUBE		BLACK	1		CHECKED			PART DESCRIPTION						
6	HEX NUT	BRASS	NICKEL	1		ISSUED			MINI SMB BULKHEAD CRIMP JACK – 75ohm (FOR RG-316U/D)						
5	LOCK WASHER	BRASS	NICKEL	1		SHEET	1 OF 1		PART NO.						
4	FERRULE	COPPER	NICKEL	1					142180-75						
3	CONTACT PIN	BRASS	GOLD	1											
2	INSULATOR	TEFLON	NATURAL	1											
1	BODY	BRASS	NICKEL	1											
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE C:/142/142180-75.DWG		DWG. NO.	142180-75.DWG	REV.	NC	SIZE	A	SCALE	NA