

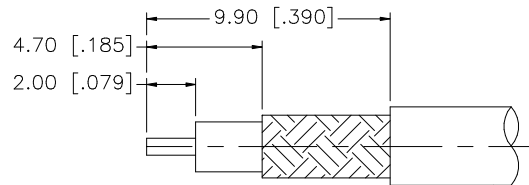
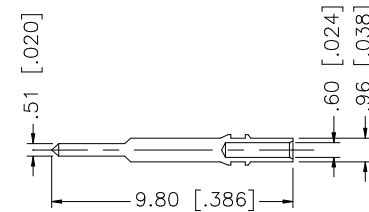
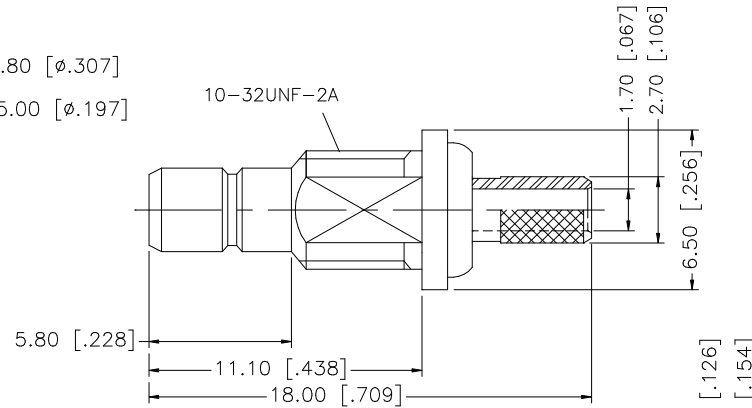





REV.	DATE	DESCRIPTION
A	04/31/03	UPDATE DRAWING FORMAT
B	05/06/07	REVISE BARREL / FERRULE DIMENSIONS

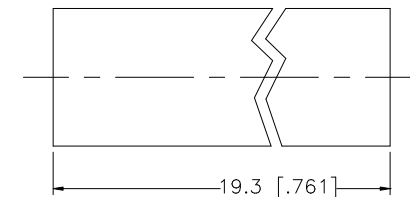

RECOMMENDED
CABLE STRIPPING DIM'S



NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .128"
2. CRIMPED CONTACT PIN SQ. CRIMP SIZE 0.7mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.	APPROVALS		DATE		Amphenol Connex									
8						DRAWN	G.R.S.	05/06/07											
7	HEAT SHRINK TUBE		BLACK	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm	CHECKED				PART DESCRIPTION									
6	HEX NUT	BRASS	NICKEL	1		ISSUED				SMB BULKHEAD CRIMP JACK (FOR RG–174/U, 188A/U, 316/U)									
5	LOCK WASHER	BRASS	NICKEL	1		SHEET		1 OF 1											
4	FERRULE	COPPER	NICKEL	1	UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”					PART NO.									
3	CONTACT PIN	BRASS	GOLD	1						142179									
2	INSULATOR	TEFLON	NATURAL	1															
1	BODY	BRASS	NICKEL	1		CAD FILE		C:/142/142179.DWG		DWG. NO.		142179.DWG		REV.	B	SIZE	A	SCALE	NA
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING														