

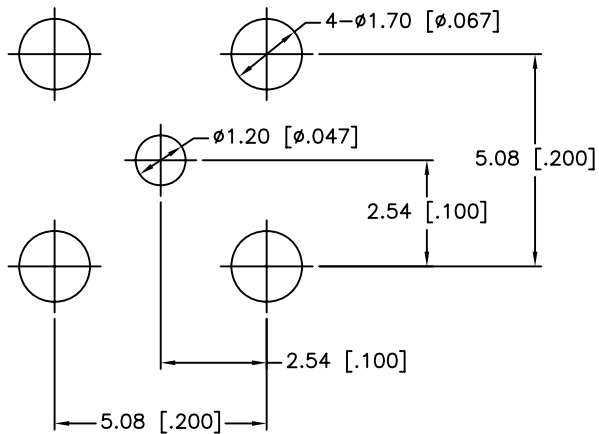



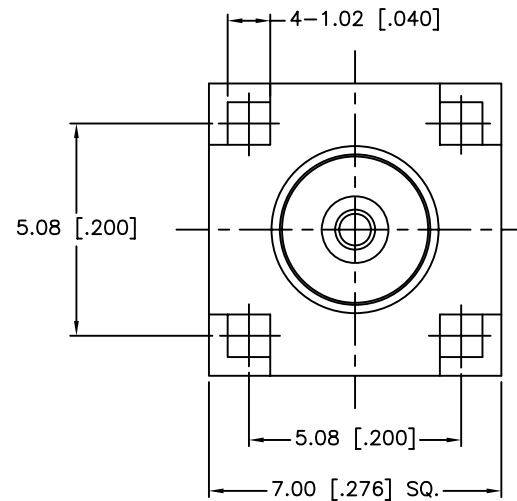

PCB MOUNTING HOLES

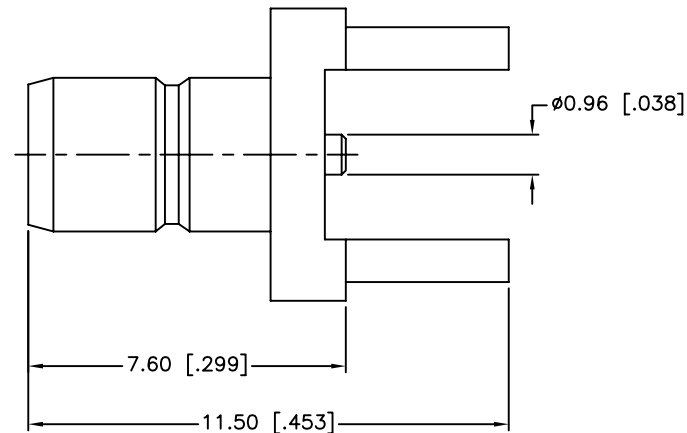

REV.	DATE	ECR NO.	DESCRIPTION
A	02/15/03	XXXXXX	MODIFY CENTER CONTACT
B	08/24/11	2220	UPDATE THE DRAWING

1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC 0-10 GHZ
3. VSWR: 1.5 MAX.
4. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.

3	CONTACT PIN	BRASS	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS		DATE
DRAWN	S.LI	08/24/11
CHECKED		
ISSUED		
SHEET	1 OF 1	
CAD FILE	C:/CONNEX/142138-11.DWG	

Amphenol Connex

PART DESCRIPTION

SMB PC MOUNT JACK-THROUGH-HOLE LEGS,
SURFACE MOUNT CENTER CONTACT

PART NO.

142138-11

DWG. NO. 142138-11.DWG

REV. B

SIZE A

SCALE NA