



REV.	DATE	ECR NO.	DESCRIPTION
NC	08/09/11	XXXXXX	INITIAL RELEASE

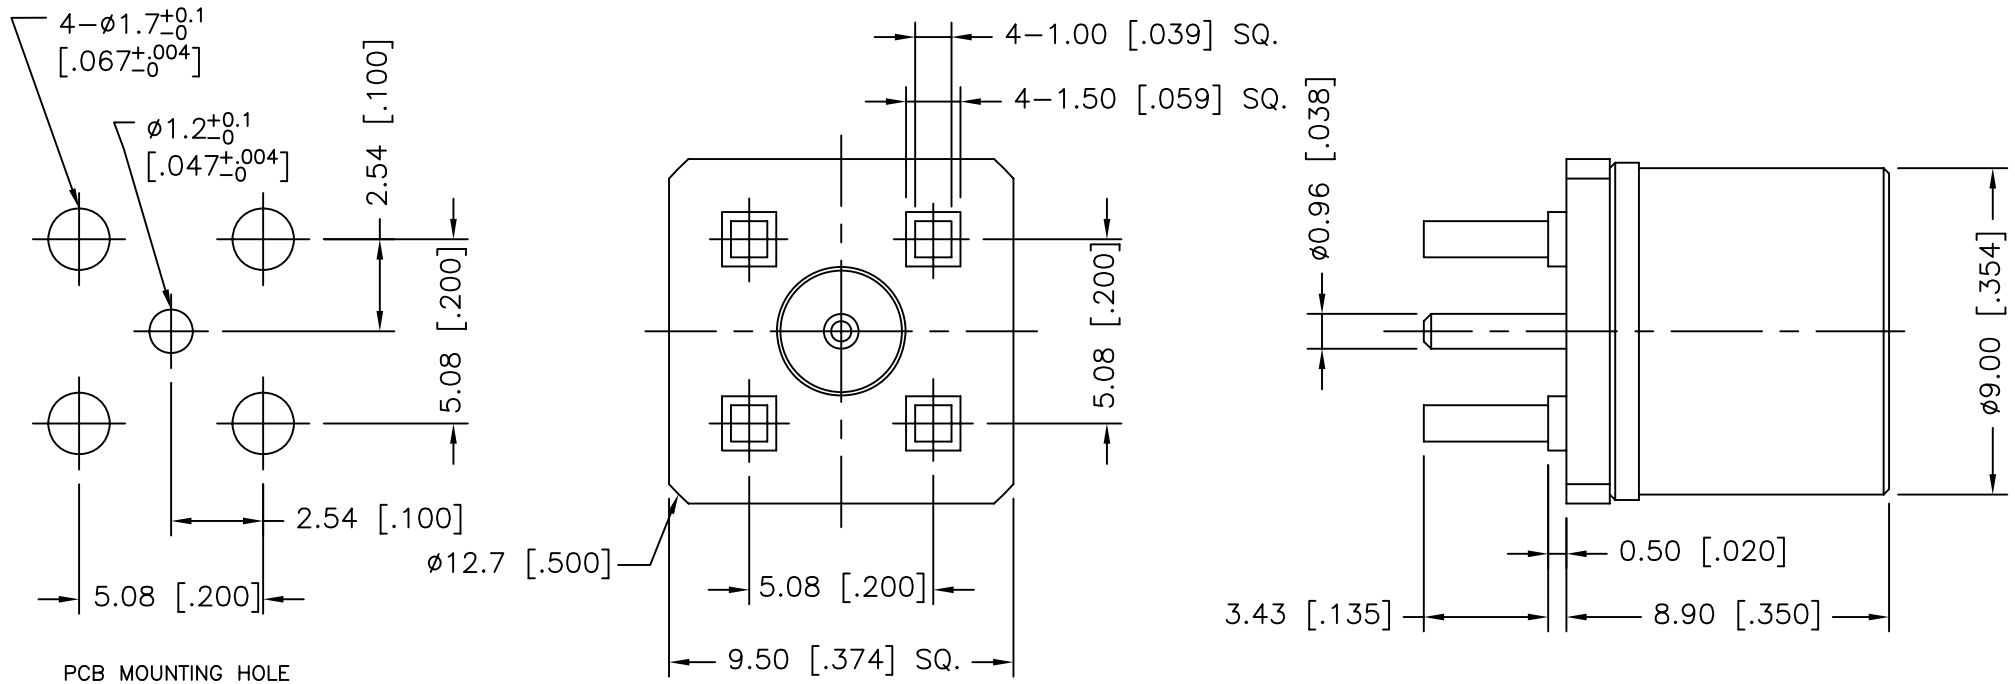

1. FREQUENCY RANGE: DC-4 GHz
2. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.

5	SHELL	BRASS	GOLD	1
4	RETAINER RING	BERYLLIUM COPPER	NATURAL	1
3	CONTACT PIN	BERYLLIUM COPPER	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20 mm
8 - 30mm ± 0.40 mm
30 - 120mm ± 0.50 mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007 "
.315 - 1.180 = ± 0.015 "
1.180 - 4.724 = ± 0.020 "

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	08/09/11
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE C:/CONNEX/142135.DWG	

Amphenol Connex

PART DESCRIPTION

SMB P.C.B MOUNT PLUG - 75 ohm

PART NO.

142135

DWG. NO. 142135.DWG

REV. NC

SIZE A

SCALE NA