
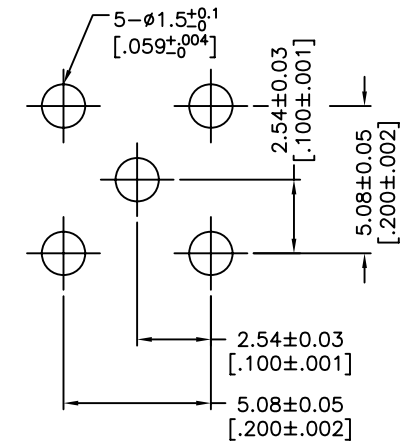
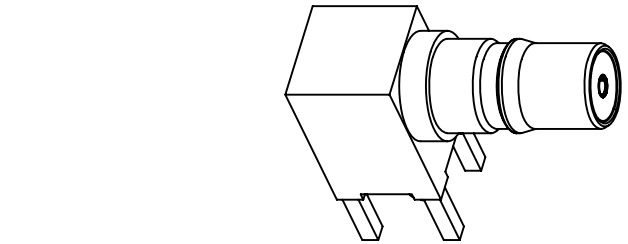


REV.	DATE	ECR NO.	DESCRIPTION
NC	06/15/11	XXXXXX	INITIAL RELEASE

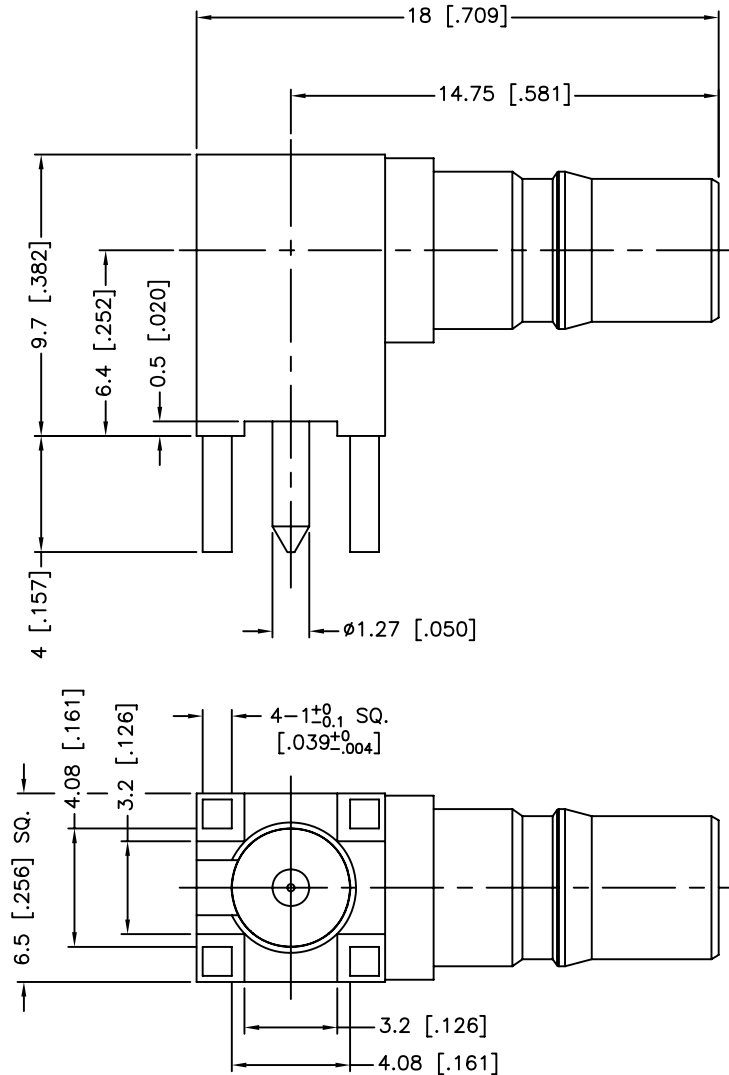

PCB MOUNTING HOLE

1. IMPEDANCE:50 OHM
2. FREQUENCY RANGE: 0-6 GHz
3. DIELECTRIC WITHSTANDING VOLTAGE:1000 VRMS. MIN.
4. DURABILITY:100 CYCLES MIN.
5. TEMPERATURE RANGE:-40°C TO +85°C

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING					APPROVALS		DATE		Amphenol Connex																	
					DRAWN		M.ZHANG							06/15/11												
					CHECKED				PART DESCRIPTION QMA R/A PCB MOUNT JACK – 50 OHM																	
					ISSUED																					
					SHEET		1 OF 1																			
					PART NO.					134101																
					CAD FILE		C:/CONNEX/134101.DWG			DWG. NO.		134101.DWG			REV.		NC		SIZE		A		SCALE		NA	
3		CONTACT PIN		BERYLLIUM COPPER		GOLD		1																		
2		INSULATOR		PTFE		NATURAL		1																		
1		BODY		BRASS		GOLD		1																		
		DESCRIPTION		MATERIAL		FINISH		QTY																		