

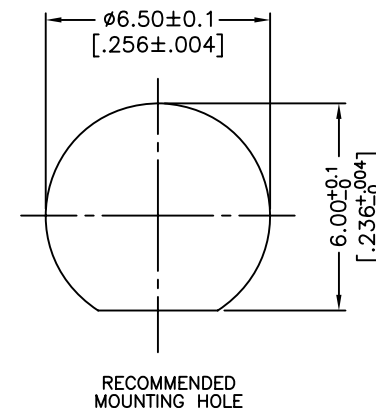
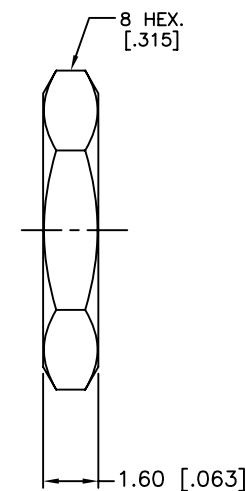


RECOMMENDED
CABLE STRIPPING DIM'S

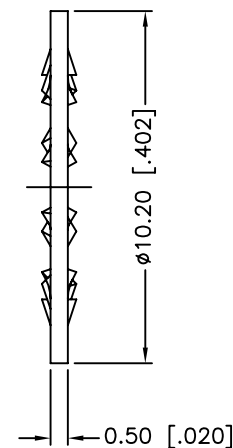

RECOMMENDED
MOUNTING HOLE

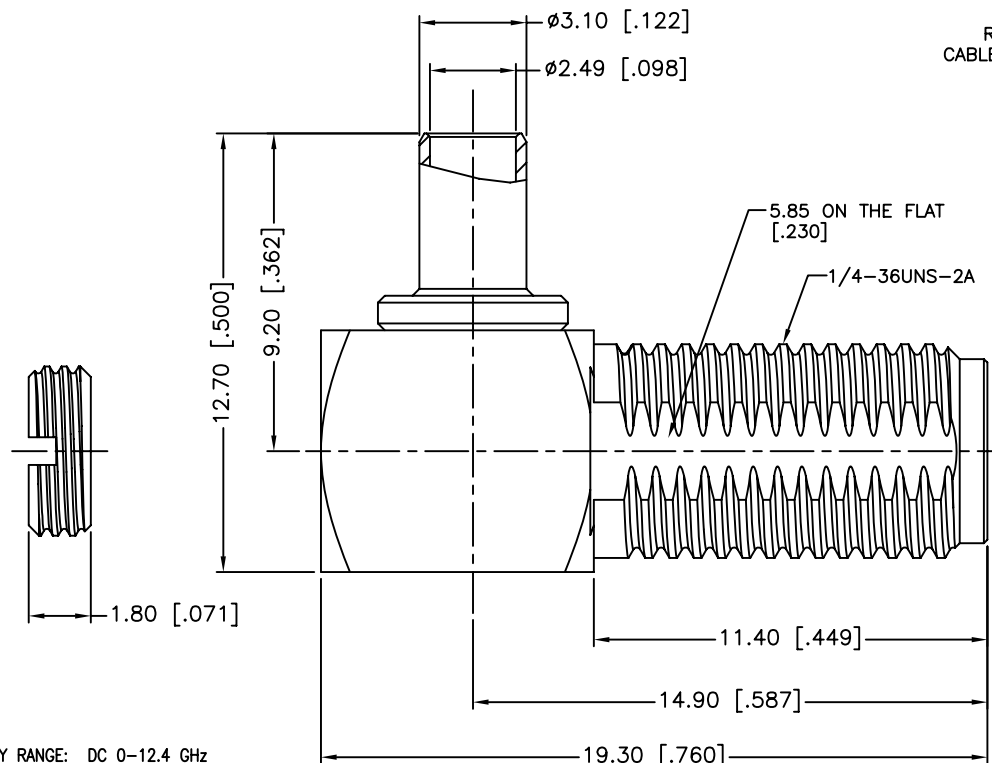

1. FREQUENCY RANGE: DC 0-12.4 GHz
2. DIELECTRIC WITHSTANDING VOLTAGE: 250 VRMS, MIN.
3. CRIMPED FERRULE
HEX CRIMP SIZE .105"
4. CONTACT PIN TO SOLDER
5. MAX. PANEL THICKNESS=3.2 mm

7	INNER FERRULE	BRASS	GOLD	1
6	HEX NUT	BRASS	GOLD	1
5	LOCK WASHER	BRASS	GOLD	1
4	COVER	BRASS	GOLD	1
3	CONTACT PIN	BERYLLIUM COPPER	GOLD	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY WITH BARREL	BRASS	GOLD	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	06/30/11
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/132427.DWG

Amphenol Connex			
PART DESCRIPTION SMA R/A BULKHEAD JACK (FOR 1.32 MM CABLE)			
PART NO. 132427			
DWG. NO.	132427.DWG	REV.	NC
SIZE	A	SCALE	NA