
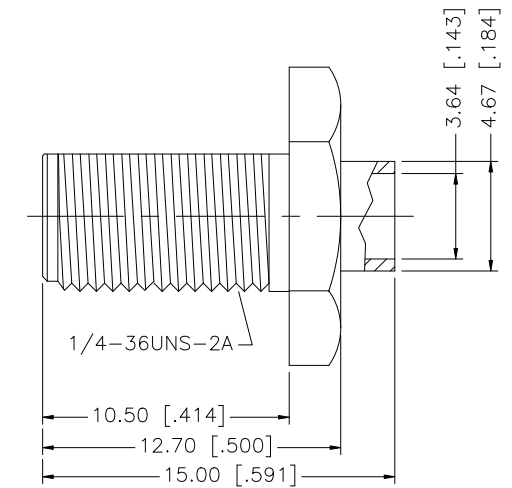

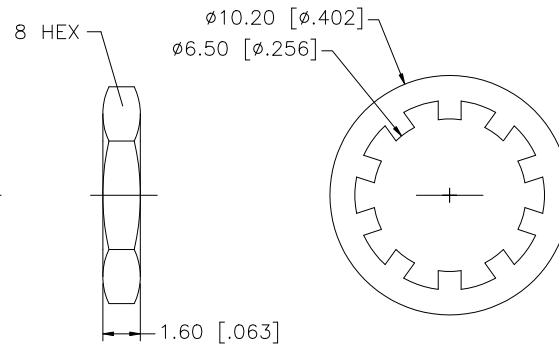
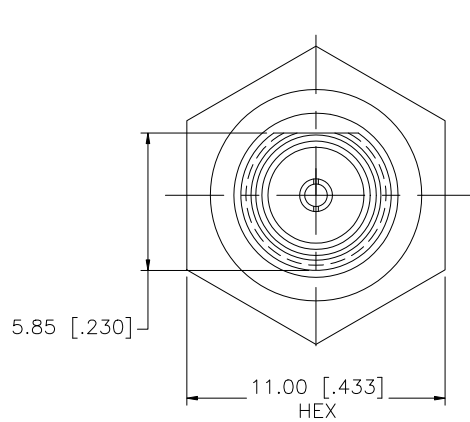



REV.	DATE	ECR NO.	DESCRIPTION
NC	12/17/08	—	INITIAL RELEASE

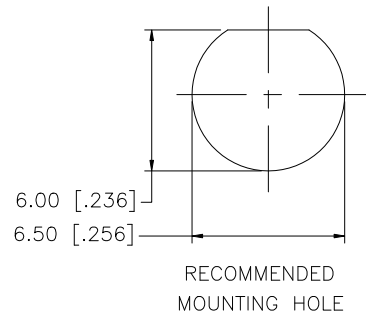

NOTE:

1. MAX. PANEL THICKNESS = 2.4mm

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
8						DRAWN	GRS	12/17/08										
7						CHECKED												
6	HEX NUT	BRASS	NICKEL	1		ISSUED				PART DESCRIPTION SMA BULKHEAD JACK (FOR .141” SEMI-RIGID CABLE)								
5	LOCK WASHER	BRASS	NICKEL	1		SHEET		1 OF 1										
4	GASKET	SILICONE	RED	1						PART NO. 132395								
3	CONTACT PIN	BER. COPPER	GOLD	1		CAD FILE		C:/132/132395.DWG										
2	INSULATOR	PTFE	NATURAL	1						DWG. NO.		132395.DWG		REV.	NC	SIZE	A	SCALE
1	BODY	BRASS	GOLD	1														
	DESCRIPTION	MATERIAL	FINISH	QTY														