









REV.	DATE	ECR NO.	DESCRIPTION
NC	05/26/11	XXXXXX	INITIAL RELEASE

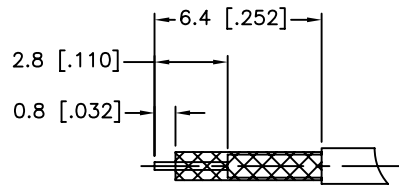

RECOMMENDED
CABLE STRIPPING DIM'S

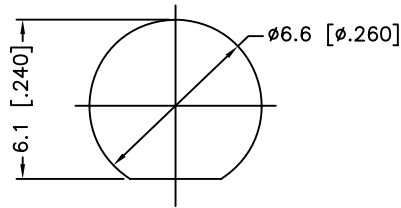

RECOMMENDED
MOUNTING HOLE

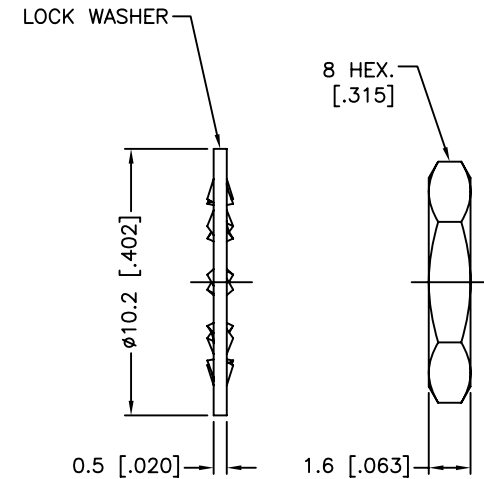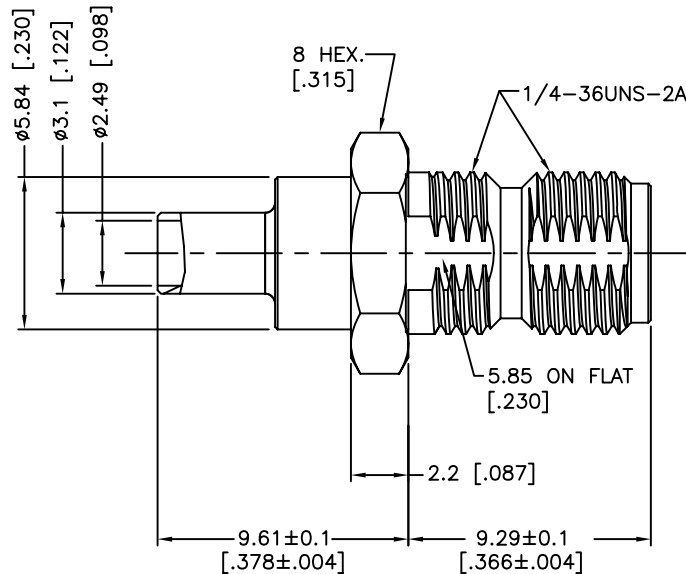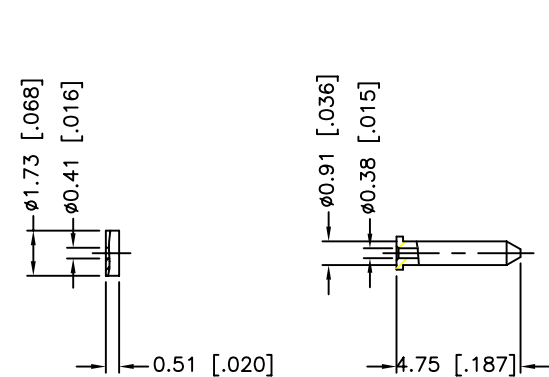

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .105"
 2. CONTACT PIN TO SOLDER
 3. MAX. PANEL THICKNESS=0.93mm

9	HEX NUT	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020"	APPROVALS	DATE	Amphenol Connex					
8	LOCK WASHER	BRASS	GOLD	1		DRAWN	M.ZHANG						05/26/11
7	INNER FERRULE	BRASS	GOLD	1		CHECKED			PART DESCRIPTION				
6	SLEEVE	BRASS	GOLD	1		ISSUED			SMA BULKHEAD CRIMP JACK, 8 [.315"] HEX. FLANGE WITHOUT O-RING (FOR 1.37 MM CABLE)				
5	INSULATOR	PTFE	NATURAL	1		SHEET	1 OF 1		PART NO.				
4	CONTACT PIN	BRASS	GOLD	1				132392-11					
3	CONTACT PIN	BER. COPPER	GOLD	1				DWG. NO.					
2	INSULATOR	PTFE	NATURAL	1				132392-11.DWG					
1	BODY	BRASS	GOLD	1				REV. NC					
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	C:/CONNEX/132392-11.DWG		SIZE A		SCALE NA			