

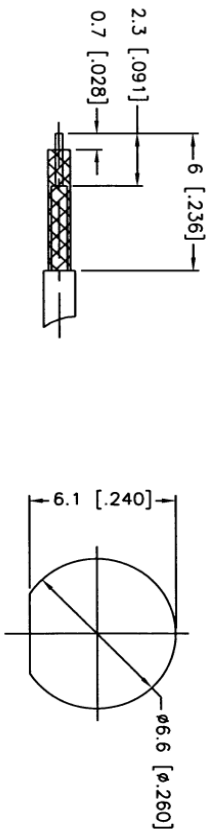


REV.	DATE	ECR NO.	DESCRIPTION
NC	01/07/10	XXXXXX	INITIAL RELEASE

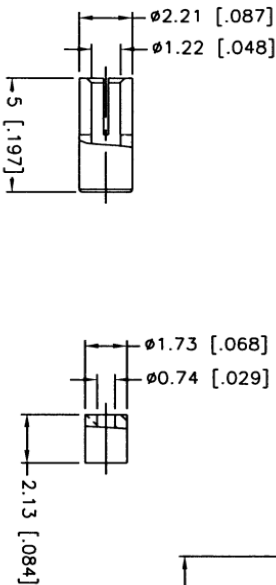

RECOMMENDED
CABLE STRIPPING DIM'S

RECOMMENDED
MOUNTING HOLE

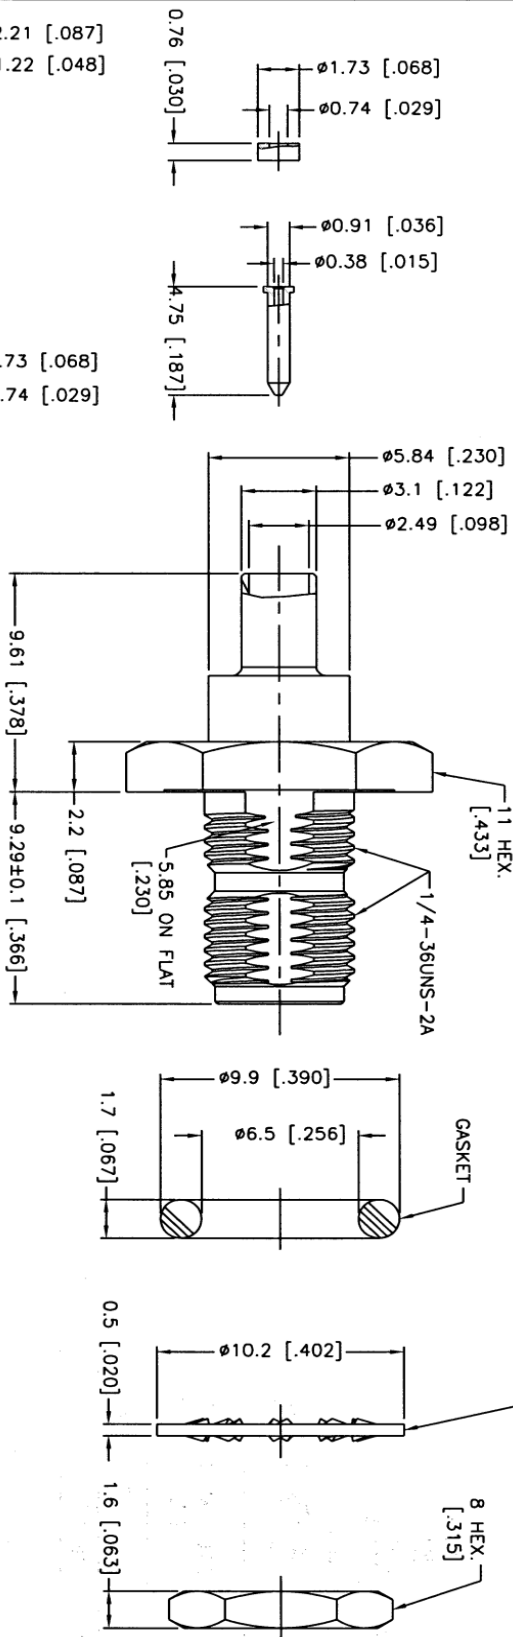

NOTE:
1. CRIMPED FERRULE
2. HEX CRIMP SIZE .105"
3. CONTACT PIN TO SOLDER
MAX. PANEL THICKNESS=0.93mm

10	HEX NUT	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS (DIMENSIONS IN 1/16" ARE NOTED AND FOR DESIGNER REFERENCE ONLY). UNLESS OTHERWISE SPECIFIED DIMENSIONS FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED DIMENSIONS FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"	APPROVALS DATE	01/07/10	132377	SMA BULKHEAD CRIMP JACK (FOR 1.13 MM CABLE)	132377.DWG	REV. NC	SIZE A	SCALE NA
9	LOCK WASHER	BRASS	GOLD	1									
8	GASKET	SILICONE	RED	1									
7	INNER FERRULE	BRASS	GOLD	1									
6	SLEEVE	BRASS	GOLD	1									
5	INSULATOR	PTFE	NATURAL	1									
4	CONTACT PIN	BRASS	GOLD	1									
3	CONTACT PIN	BER. COPPER	GOLD	1									
2	INSULATOR	PTFE	NATURAL	1									
1	BODY	BRASS	GOLD	1									
DESCRIPTION					MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING					
C:\CONNE\132377.DWG													