

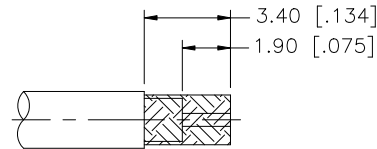
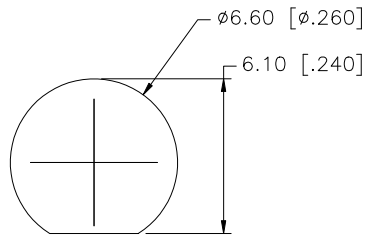
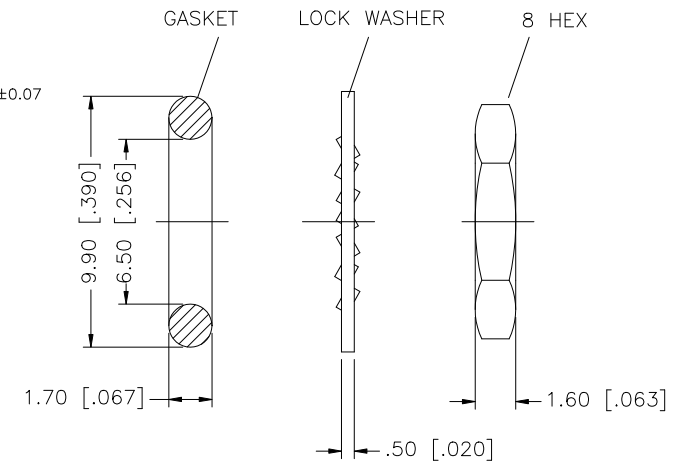
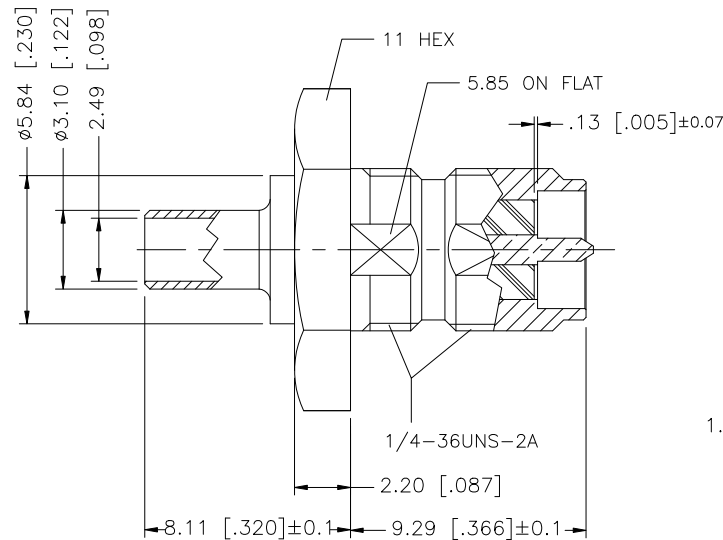


REV.	DATE	ECR NO.	DESCRIPTION
NC	03/09/09	—	INITIAL RELEASE



RECOMMENDED
CABLE STRIPPING DIM'S

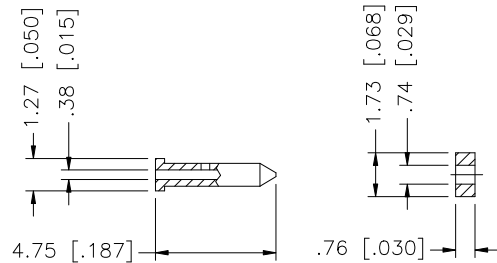

NOTES:

1. CRIMPED FERRULE HEX CRIMP SIZE .105" [2.67]
2. CONTACT PIN TO SOLDER.

8	HEX NUT	BRASS	GOLD	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex						
7	LOCK WASHER	BRASS	GOLD	1		DRAWN	GRS	03/09/09	PART DESCRIPTION SMA REVERSE POLARIZED BULKHEAD JACK FOR 1.13mm (U.FL/AMC) CABLE					
6	GASKET	SILICONE	RED	1		CHECKED								
5	INNER FERRULE	BRASS	GOLD	1		ISSUED								
4	CONTACT PIN	BRASS	GOLD	1		SHEET	1 OF 1		PART NO. 132377RP					
3	CONTACT PIN	BER. COPPER	GOLD	1	CAD FILE C:/132/132377RP.DWG		DWG. NO.	132377RP.DWG						
2	INSULATOR	PTFE	NATURAL	1										
1	BODY	BRASS	GOLD	1										
DESCRIPTION		MATERIAL	FINISH	QTY										