
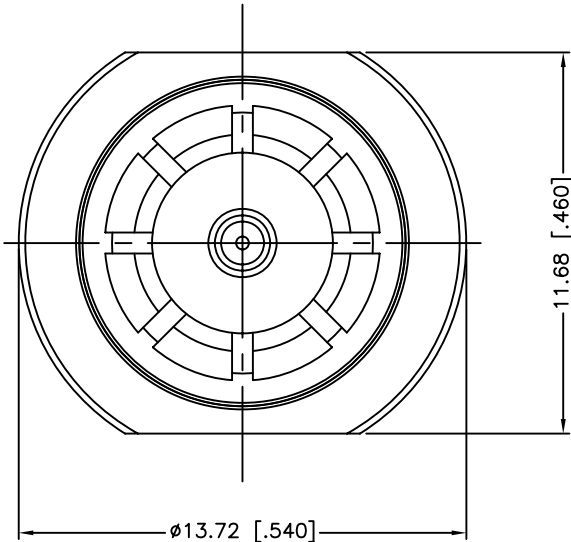
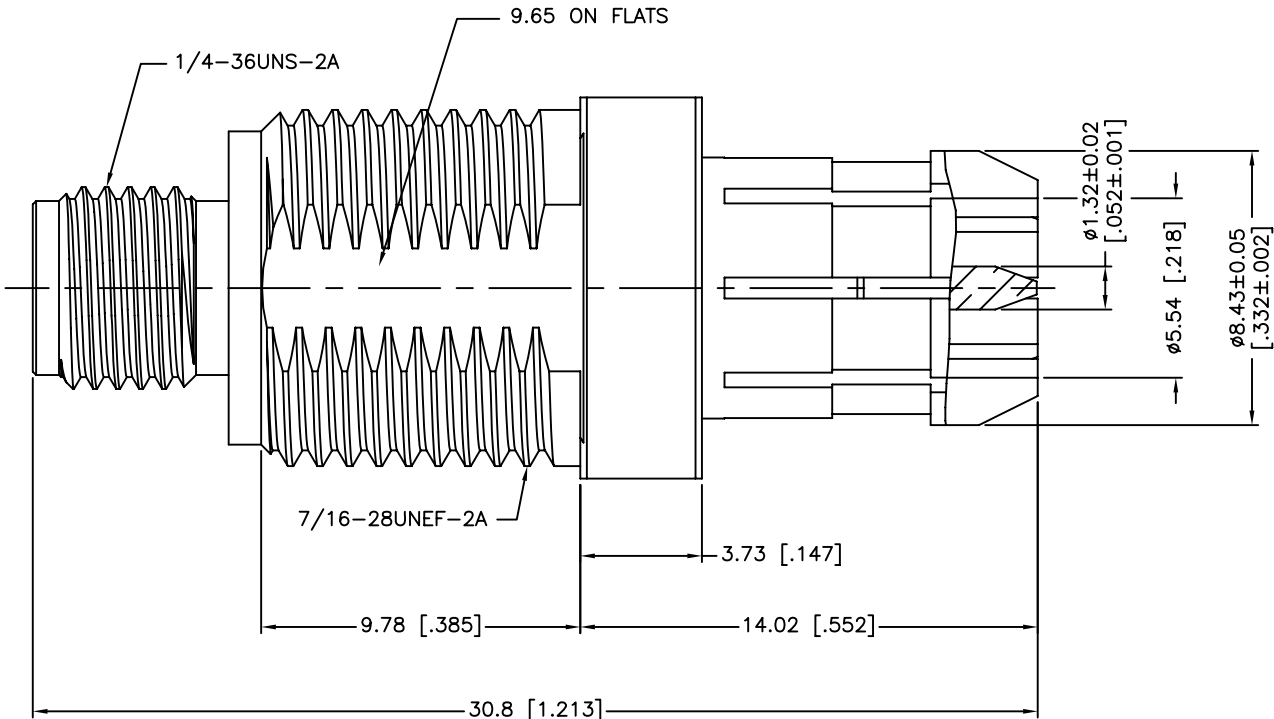


REV.	DATE	ECR NO.	DESCRIPTION
A	11/21/11	2253	CHANGE THE DESIGN

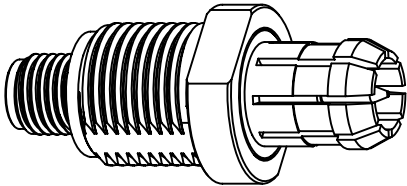

1. IMPEDANCE: 50 OHM
2. DIELECTRIC WITHSTANDING VOLTAGE: 1500 VRMS. MIN.
3. DURABILITY: 500 CYCLES MIN.
4. TEMPERATURE RANGE: -65°C TO +165°C

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING					APPROVALS		DATE		Amphenol Connex				
					DRAWN M.ZHANG		11/21/11						
					CHECKED				PART DESCRIPTION SMA JACK TO PLUG THRU BNC ADAPTER				
					ISSUED								
SHEET 1 OF 1													
		PART NO. 132375											
DWG. NO.		132375.DWG			REV.	A	SIZE	A	SCALE	NA			

4	CONTACT PIN	BERYLLIUM COPPER	GOLD	1
3	HOUSING	BRASS	NICKEL	1
2	INSULATOR	PTFE	NATURAL	1
1	BODY	BRASS	NICKEL	1
DESCRIPTION		MATERIAL	FINISH	QTY