



REV.	DATE	DESCRIPTION
NC	09/25/05	INITIAL RELEASE

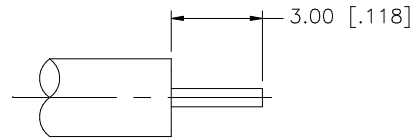

RECOMMENDED
CABLE STRIPPING DIM'S

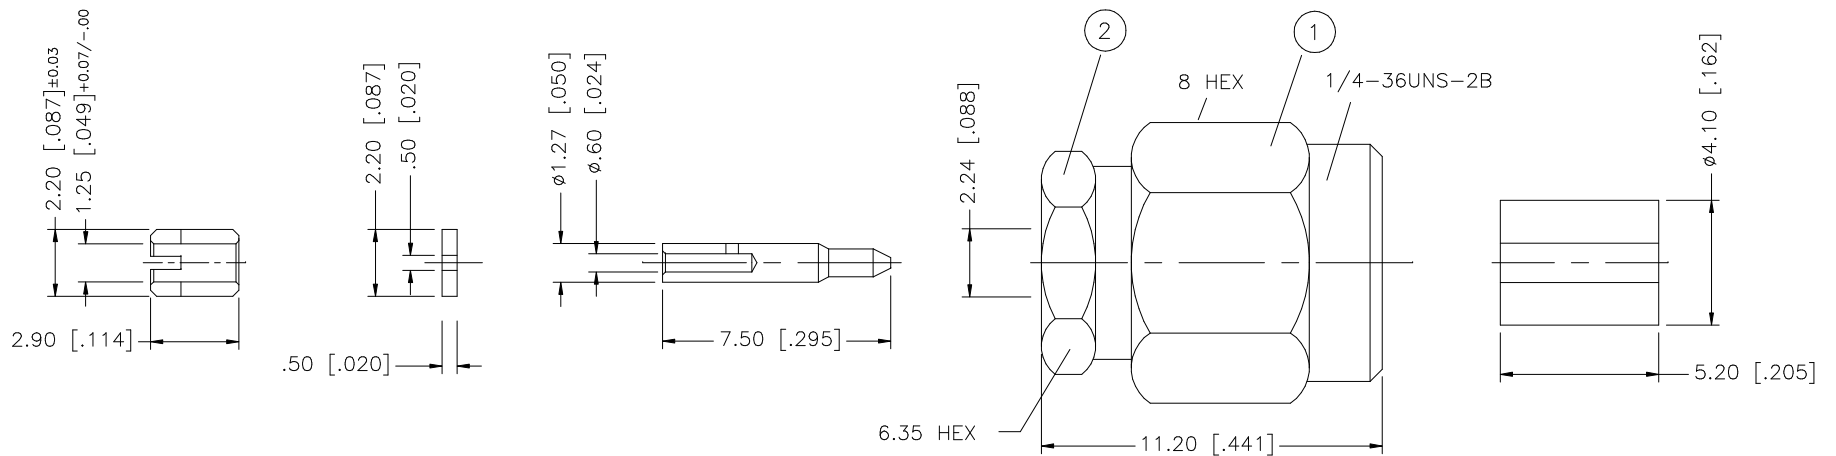

1. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex				
8						DRAWN	G.R.S.					09/25/05
7						CHECKED			PART DESCRIPTION SMA DIRECT SOLDER PLUG (FOR .047” CABLE)			
6	SOLDER BARREL	BRASS	GOLD	1		ISSUED						
5	INSULATOR	TEFLON	NATURAL	1		SHEET	1 OF 1		PART NO. 132370			
4	CONTACT PIN	BRASS	GOLD	1								
3	INSULATOR	TEFLON	NATURAL	1					DWG. NO. 132370.DWG REV. NC SIZE A SCALE NA			
2	BODY	BRASS	GOLD	1								
1	SHELL	STAINLESS STEEL	PASSIVATED S.S.	1								
	DESCRIPTION	MATERIAL	FINISH	QTY		CAD FILE C:/132/132370.DWG						