
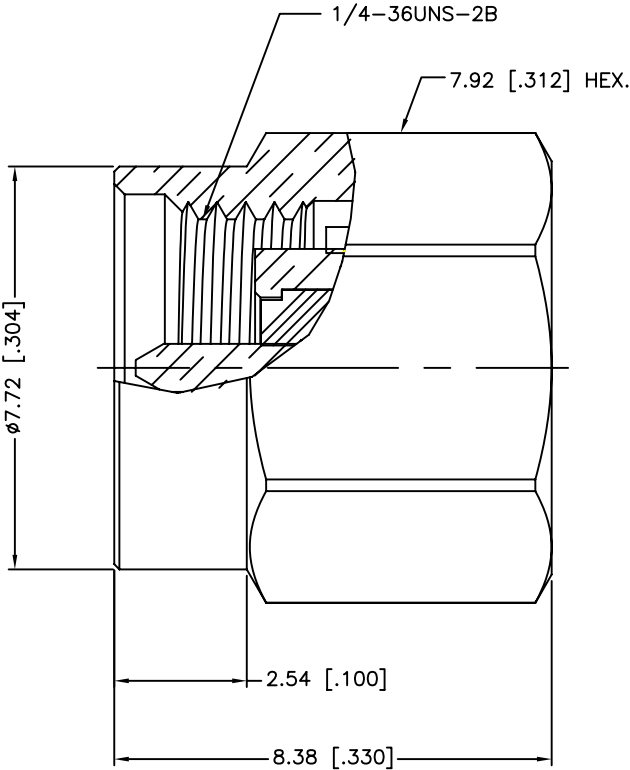


REV.	DATE	ECR NO.	DESCRIPTION
NC	09/27/11	XXXXXX	INITIAL RELEASE
A	10/06/11	2236	UPDATE THE RESISTOR'S DESCRIPTION

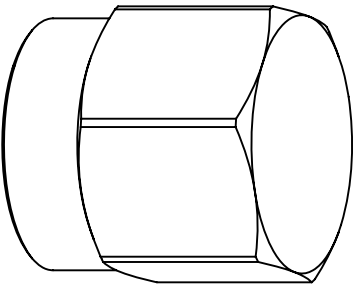

1. IMPEDANCE:50 OHM
2. FREQUENCY RANGE: 0-18 GHz.
3. DURABILITY:500 CYCLES MIN.

6	RESISTOR	100 OHM, 0.1 WATT, 1%		2
5	CONTACT PIN	BRASS	GOLD	1
4	INSULATOR	PTFE	NATURAL	1
3	GASKET	SILICON RUBBER	RED	1
2	BODY	BRASS	NICKEL	1
1	SHELL	BRASS	NICKEL	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm 30 - 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 - .315 = ± 0.007" .315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE
	DRAWN M.ZHANG	10/06/11
	CHECKED	
	ISSUED	
	SHEET 1 OF 1	
	CAD FILE C:/CONNEX/132360N.DWG	

Amphenol Connex			
PART DESCRIPTION SMA TERMINATOR PLUG (FOR 50 OHMS)			
PART NO. 132360N			
DWG. NO.	132360N.DWG	REV. A	SIZE A SCALE NA