
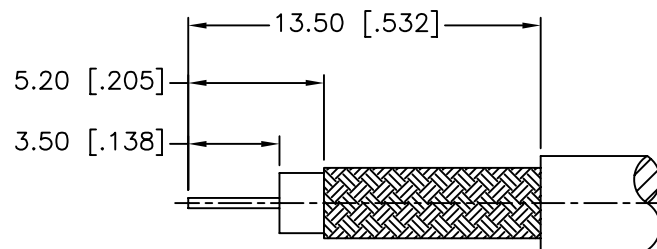


REV.	DATE	ECR NO.	DESCRIPTION
NC	08/21/09	XXXXXX	INITIAL RELEASE

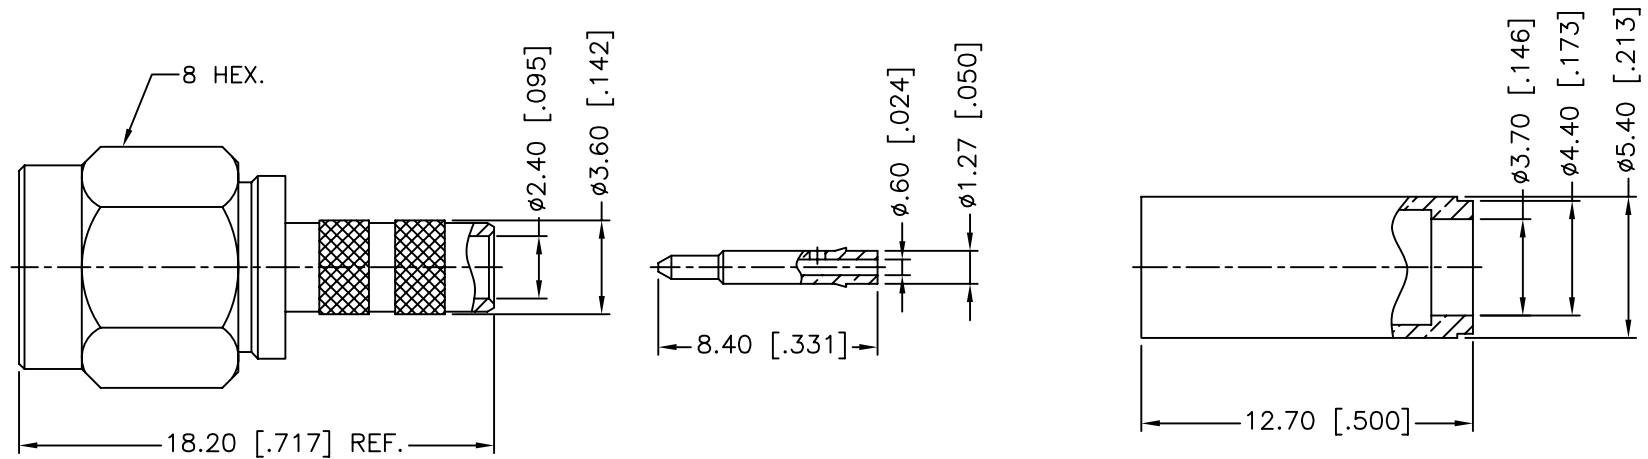

RECOMMENDED
CABLE STRIPPING DIM'S

NOTES:

1. CRIMPED FERRULE
HEX. CRIMP SIZE .178"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex				
7	FERRULE	BRASS	GOLD	1		DRAWN	J.CHENG	08/21/09						
6	CONTACT PIN	BRASS	GOLD	1		CHECKED			PART DESCRIPTION SMA CRIMP PLUG					
5	GASKET	SILICONE	RED	1		ISSUED								
4	RETAINER RING	BERYLLIUM COPPER	NATURAL	1		SHEET	1 OF 1		PART NO. 132356					
3	INSULATOR	PTFE	NATURAL	1										
2	BODY	BRASS	GOLD	1					DWG. NO. 132356.DWG REV. NC SIZE A SCALE NA					
1	SHELL	BRASS	GOLD	1										
	DESCRIPTION	MATERIAL	FINISH	QTY	C:/CONNEX/132356.DWG									