






REV.	DATE	DESCRIPTION
NC	05/30/04	INITIAL RELEASE



RECOMMENDED
CABLE STRIPPING DIM'S

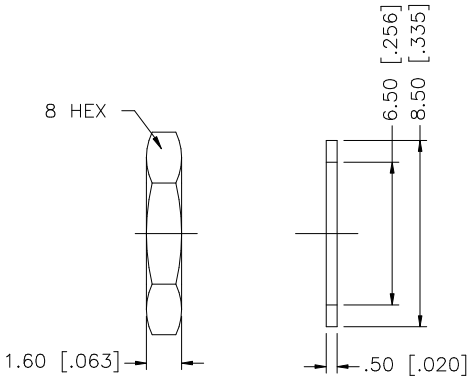

RECOMMENDED
MOUNTING HOLE

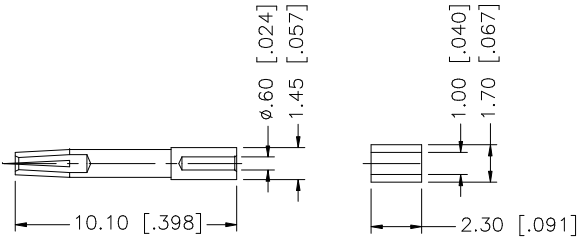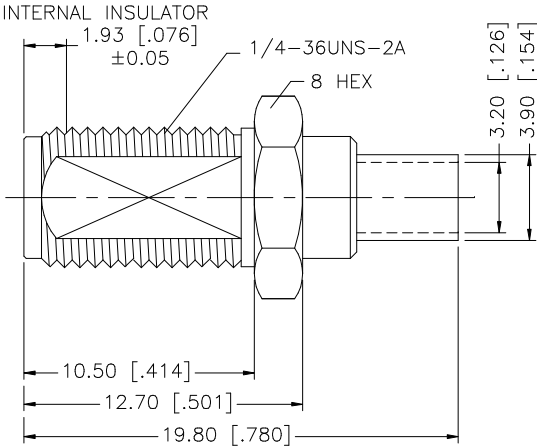

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
 2. CONTACT PIN TO SOLDER
 3. MAX. PANEL THICKNESS = 2.4mm

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex								
7						DRAWN	G.R.S.						05/30/04			
6	FERRULE	BRASS	GOLD	1		CHECKED										
5	HEX NUT	BRASS	GOLD	1		ISSUED			PART DESCRIPTION							
4	LOCK WASHER	BRASS	GOLD	1		SHEET	1 OF 1		SMA BULKHEAD CRIMP JACK – SMALL BODY (FOR RG–178B/U, 196A/U)							
3	CONTACT PIN	BER. COPPER	GOLD	1					PART NO.							
2	INSULATOR	TEFLON	NATURAL	1					132286–11							
1	BODY	BRASS	GOLD	1					DWG. NO.							
	DESCRIPTION	MATERIAL	FINISH	QTY					132286–11.DWG		REV.	NC	SIZE	A	SCALE	NA