


REV.	DATE	DESCRIPTION
NC	05/30/00	INITIAL RELEASE
A	01/25/06	UPDATE DRAWING FORMAT
B	10/24/06	REVISE DESCRIPTION AND ADD CABLE CALL OUT,

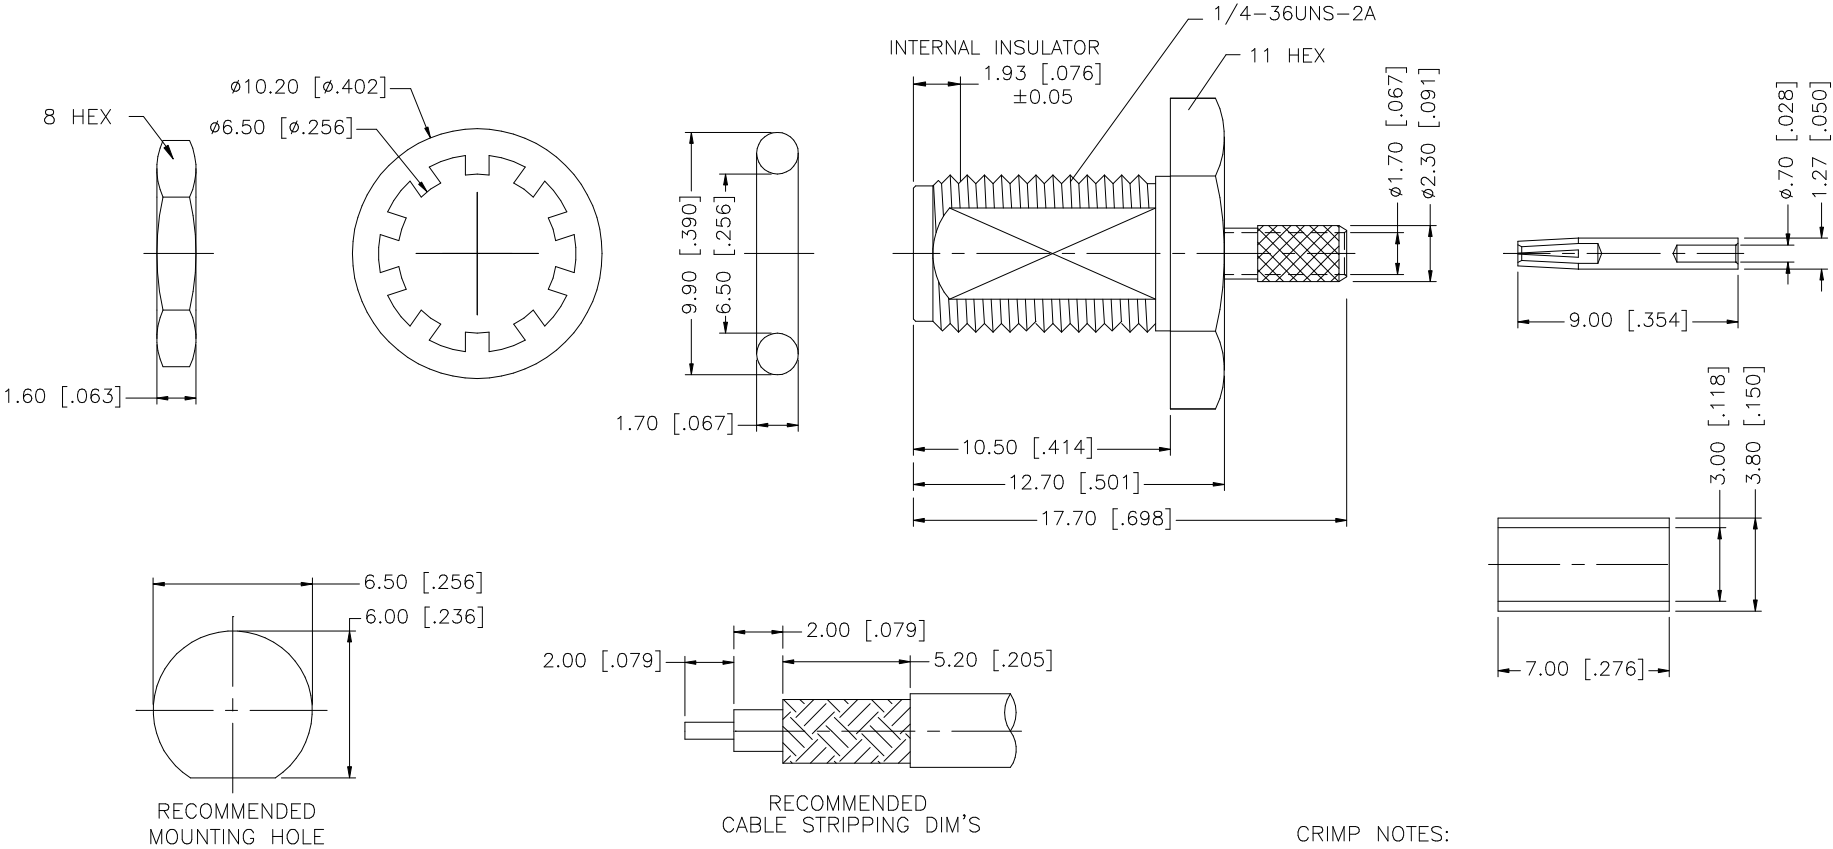

CRIMP NOTES:
1. CRIMPED FERRULE
HEX CRIMP SIZE .151"

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS		DATE		<h1>Amphenol Connex</h1>									
7	FERRULE	COPPER	GOLD	1		DRAWN	G.R.S.	10/24/06											
6	HEX NUT	BRASS	GOLD	1		CHECKED			PART DESCRIPTION SMA BULKHEAD JACK O-RING SEAL (FOR RG-316/U DOUBLE BRAID CABLE)										
5	LOCK WASHER	BRASS	GOLD	1		ISSUED													
4	GASKET	SILICONE	RED	1		SHEET	1 OF 1							PART NO. 132285					
3	CONTACT PIN	BER. COPPER	GOLD	1		CAD FILE C:/132/132285.DWG				DWG. NO. 132285.DWG		REV. B	SIZE A						SCALE NA
2	INSULATOR	TEFLON	NATURAL	1															
1	BODY	BRASS	GOLD	1															
DESCRIPTION MATERIAL FINISH QTY																			