






REV.	DATE	DESCRIPTION
NC	11/06/04	INITIAL RELEASE

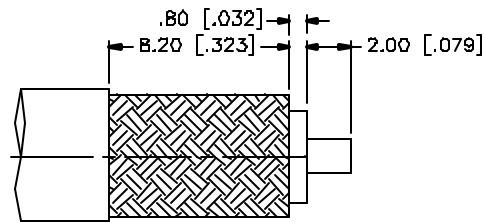

RECOMMENDED
CABLE STRIPPING DIM'S



RECOMMENDED
MOUNTING HOLE

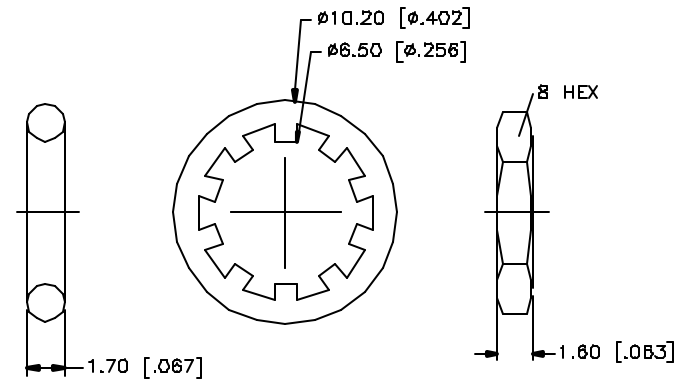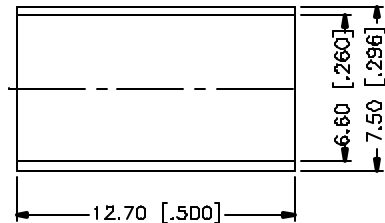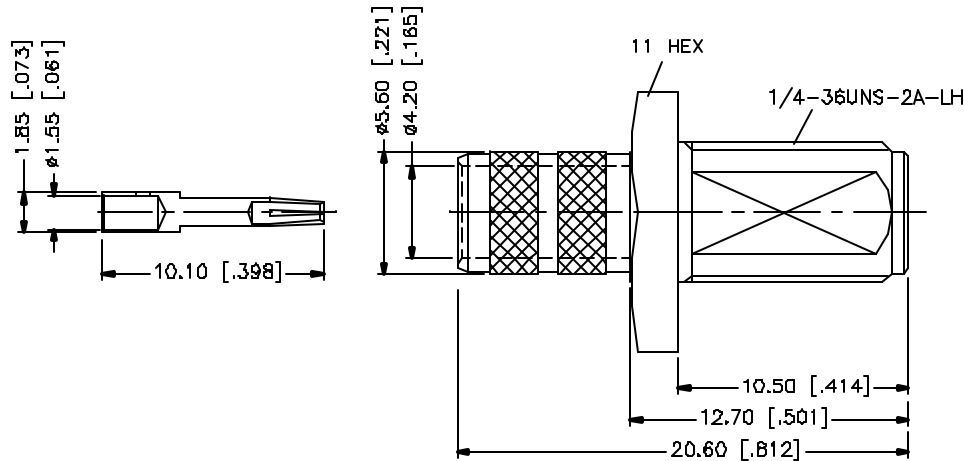

- NOTE:
1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
 2. CONTACT PIN TO SOLDER

REV.	DATE	DESCRIPTION
NC	11/06/04	INITIAL RELEASE
8		
7	FERRULE	COPPER
6	HEX NUT	BRASS
5	LOCK WASHER	BRASS
4	GASKET	SILICONE
3	CONTACT PIN	BER. COPPER
2	INSULATOR	TEFLON
1	BODY	BRASS
	DESCRIPTION	MATERIAL
		FINISH
		QTY
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS, DIMENSIONS IN () ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:		
0.5 - 8mm ± 0.20mm		
8 - 30mm ± 0.40mm		
30 - 120mm ± 0.60mm		
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:		
.020 - .315 ± 0.007"		
.315 - 1.180 ± 0.015"		
1.180 - 4.724 ± 0.020"		
DO NOT SCALE DRAWING		
APPROVALS		
DATE		
DRAWN G.R.S. 11/06/04		
CHECKED		
ISSUED		
SHEET 1 OF 1		
CAD FILE		
C:/132/132283RT.DWG		
PART DESCRIPTION		
SMA BULKHEAD CRIMP JACK		
REVERSE THREAD (FOR RG-8/X, LMR240)		
PART NO.		
132283RT		
DWG. NO.		
132283RT.DWG		
REV. NC		
SIZE A		
SCALE NA		

Amphenol Connex