









REV.	DATE	DESCRIPTION
NC	04/29/99	INITIAL RELEASE
A	04/02/08	UPDATE DRAWING FORMAT



RECOMMENDED
MOUNTING HOLE

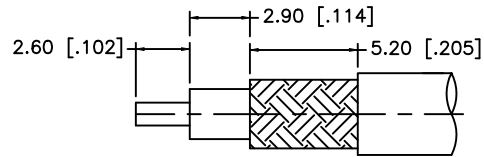

RECOMMENDED CABLE
STRIPPING DIM'S

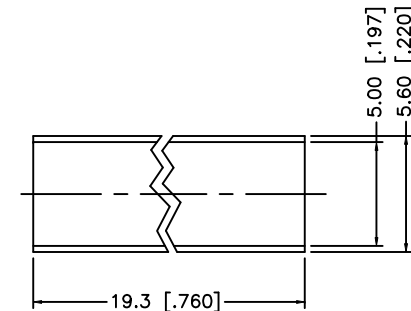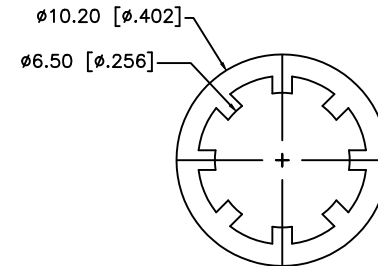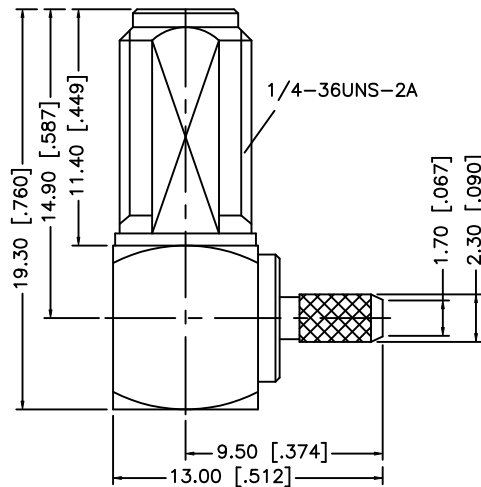

NOTE:

1. CRIMPED FERRULE HEX CRIMP SIZE .151"
2. CONTACT PIN TO SOLDER
3. MAX. PANEL THICKNESS = 3.2mm

						UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex						
8						UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		DRAWN		G.R.S.							04/02/08	
7	HEAT SHRINK TUBE				1			CHECKED										
6	FERRULE	COPPER	GOLD	1				ISSUED										
5	HEX NUT	BRASS	GOLD	1				SHEET		1 OF 1				PART DESCRIPTION SMA R/A BULKHEAD JACK (FOR RG316 DOUBLE BRAID CABLE)				
4	LOCK WASHER	BRASS	GOLD	1														
3	CONTACT PIN	BER. COPPER	GOLD	1										PART NO. 132259				
2	INSULATOR	PTFE	NATURAL	1														
1	BODY	BRASS	GOLD	1										DWG. NO. 132259.DWG				
DESCRIPTION		MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING		C:/132/132259.DWG						REV. A					