

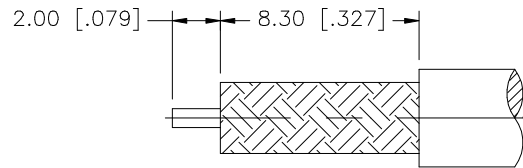
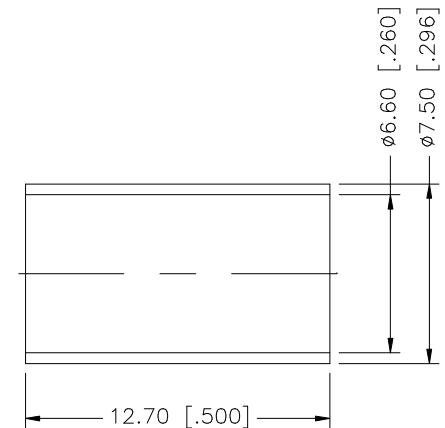


REV.	DATE	DESCRIPTION
NC	12/12/05	INITIAL RELEASE

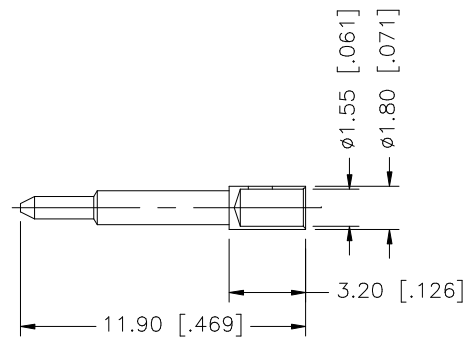

RECOMMENDED
CABLE STRIPPING DIM'S

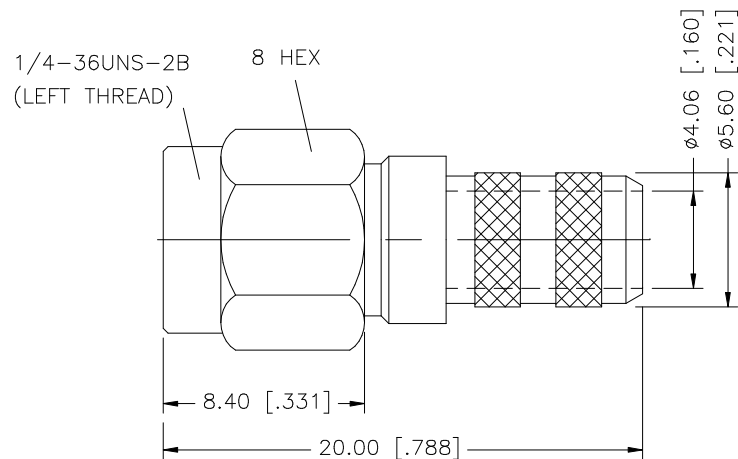

NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .255"
2. CONTACT PIN TO SOLDER

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”	APPROVALS	DATE	Amphenol Connex					
8						DRAWN	G.R.S.						12/12/05
7						CHECKED			PART DESCRIPTION SMA CRIMP PLUG – REVERSE THREAD (FOR RG-8/X, LMR-240)				
6						ISSUED							
5						SHEET	1 OF 1		PART NO. 132231RT				
4	FERRULE	COPPER	GOLD	1									
3	CONTACT PIN	BRASS	GOLD	1				DWG. NO. 132231RT.DWG					
2	INSULATOR	TEFLON	NATURAL	1									
1	HOUSING/BODY	BRASS	GOLD	1				REV. NC	SIZE A	SCALE NA			
	DESCRIPTION	MATERIAL	FINISH	QTY	DO NOT SCALE DRAWING	CAD FILE C:/132/132231RT.DWG							