

17.10 [.673] REF.

13.10 [.516] REF.

1/4-36UNS-2B

8 [.315] HEX.



1.80 [.071]

9.00 [.354]

12.50 [.492]

1.00 [.039]

1.70 [.067]

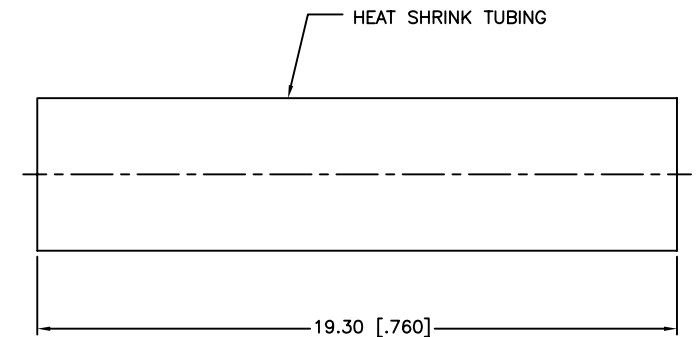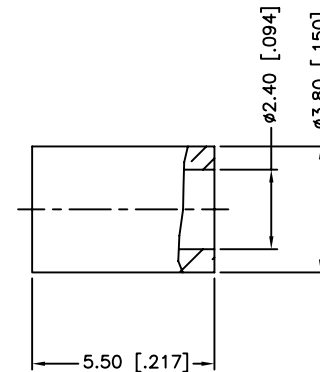

9	HEAT SHRINK TUBING		BLACK	1	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex						
8	FERRULE	COPPER	GOLD	1		DRAWN	M.ZHANG					04/16/12		
7	COVER	BRASS	GOLD	1		CHECKED			PART DESCRIPTION SMA REVERSE POLARITY R/A CRIMP PLUG (FOR RG–178B/U,196A/U CABLE)					
6	HOUSING WITH BARREL	BRASS	GOLD	1		ISSUED								
5	CONTACT PIN	BERYLLIUM COPPER	GOLD	1		SHEET	1 OF 1		PART NO. 132173RP					
4	INSULATOR	PTFE	NATURAL	1										
3	RETAINER RING	SUS 304	NATURAL	1		CAD FILE			DWG. NO. 132173RP.DWG					
2	GASKET	SILICON RUBBER	RED	1									REV.	NC
1	SHELL	BRASS	GOLD	1										
	DESCRIPTION	MATERIAL	FINISH	QTY			C:/CONNEX/132173RP.DWG							