



1/4-36UNS-2A





RECOMMENDED
MOUNTING HOLE

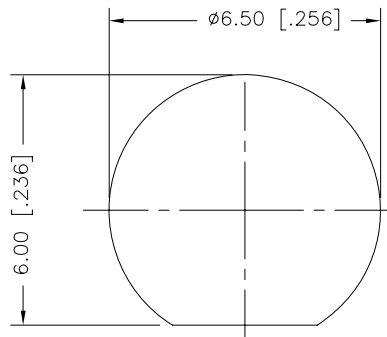

RECOMMENDED
MOUNTING HOLE

REV.	DATE	ECR NO.	DESCRIPTION
NC	09/17/09	XXXXXX	INITIAL RELEASE

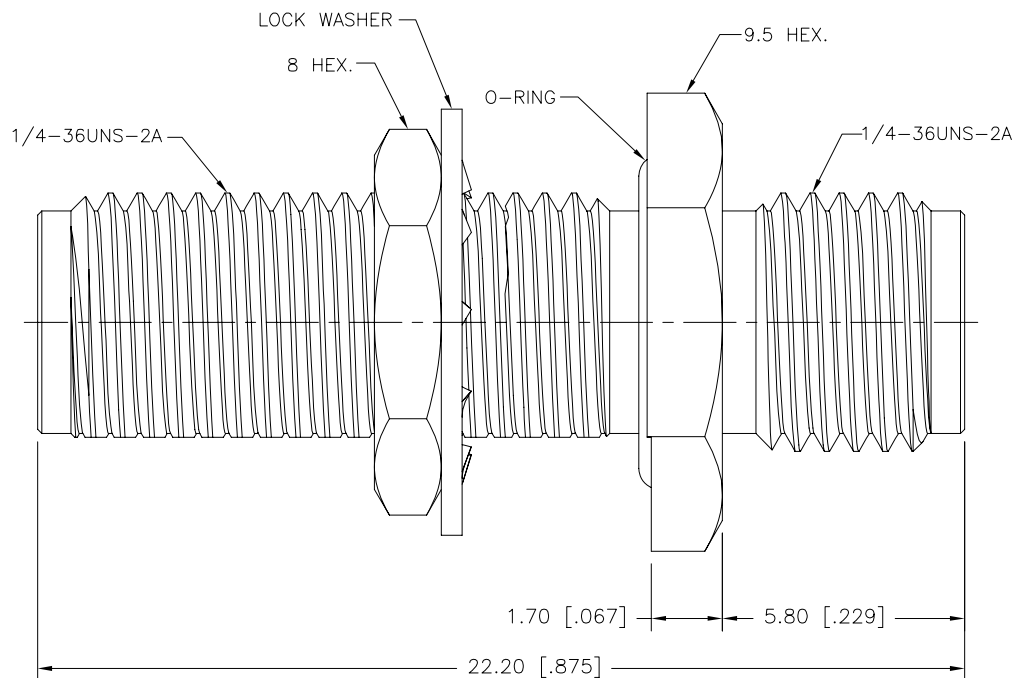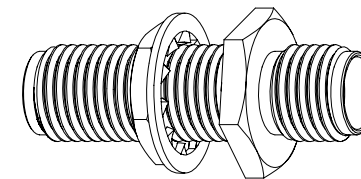

NOTES:
1. MAX. PANEL THICKNESS= 6.5 MM

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.		APPROVALS		DATE		Amphenol Connex									
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm		DRAWN J.CHENG		09/17/09											
					UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020”		CHECKED								PART DESCRIPTION SMA BULKHEAD FEMALE TO FEMALE ADAPTOR					
							ISSUED													
							SHEET 1 OF 1													
											PART NO. 132170–13									
							CAD FILE		C:/CONNEX/132170–13.DWG		DWG. NO.		132170–13.DWG		REV. NC		SIZE A		SCALE NA	
							DO NOT SCALE DRAWING													
6	GASKET		SILICONE		BLACK		1													
5	HEX NUT		BRASS		GOLD		1													
4	LOCK WASHER		BRASS		GOLD		1													
3	CONTACT PIN		BER. COPPER		GOLD		1													
2	INSULATOR		PTFE		NATURAL		1													
1	BODY		BRASS		GOLD		1													
	DESCRIPTION		MATERIAL		FINISH		QTY													