

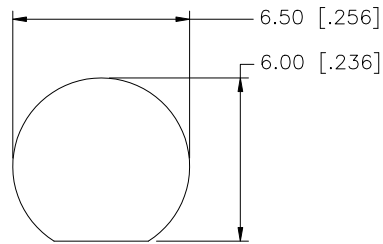


REV.	DATE	ECR NO.	DESCRIPTION
NC	04/20/08	—	INITIAL RELEASE

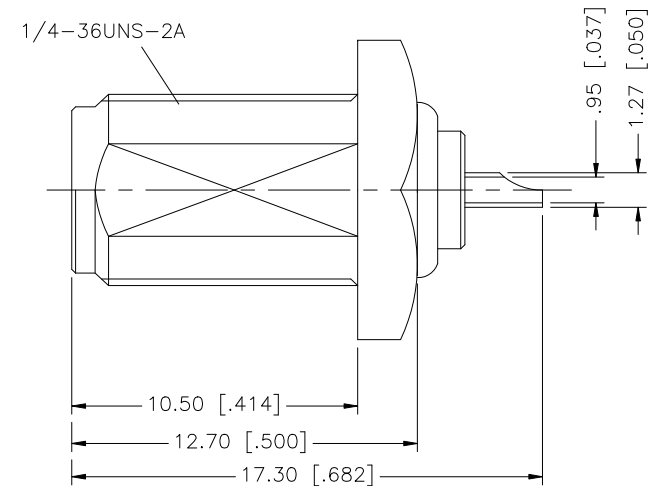

RECOMMENDED
MOUNTING HOLE

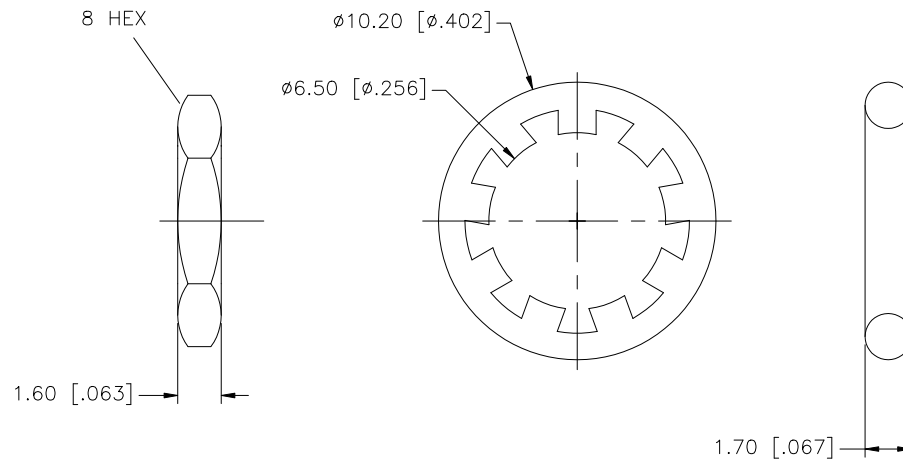

					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING	APPROVALS	DATE	Amphenol Connex							
						DRAWN	GRS							04/20/08	
						CHECKED			PART DESCRIPTION						
6	HEX NUT	BRASS	GOLD	1											
5	LOCK WASHER	BRASS	GOLD	1					SMA REVERSE POLARIZED BULKHEAD RECEPTACLE						
4	GASKET	SILICONE	RED	1											
3	CONTACT PIN	BRASS	GOLD	1					PART NO.						
2	INSULATOR	PTFE	NATURAL	1											
1	BODY	BRASS	GOLD	1					132138RP						
	DESCRIPTION	MATERIAL	FINISH	QTY											
						CAD FILE	C:/132/132138RP.DWG	DWG. NO.	132138RP.DWG	REV.	NC	SIZE	A	SCALE	NA