
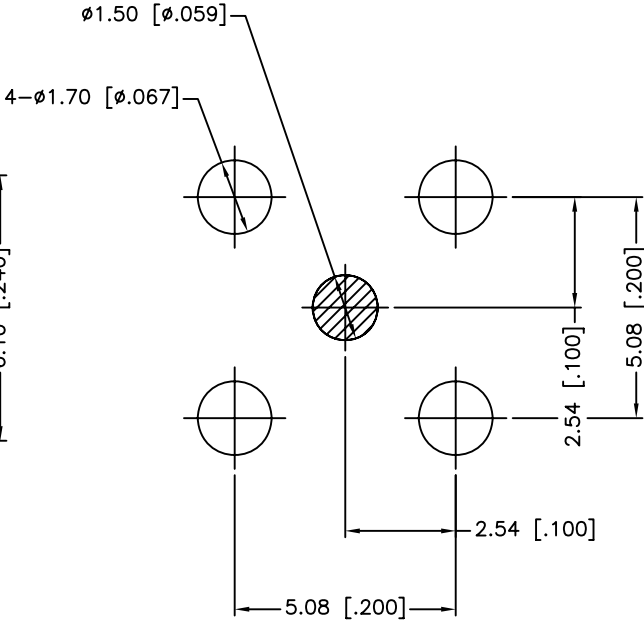
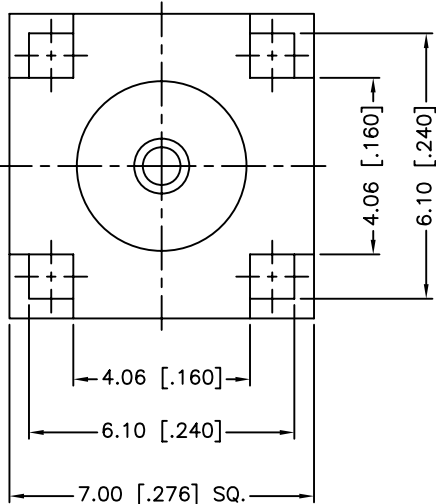


1. IMPEDANCE: 50 OHM
2. FREQUENCY RANGE: DC TO 12.4 GHz
3. DIELECTRIC WITHSTANDING VOLTAGE: 1000 VRMS, MIN.
4. DURABILITY: 500 CYCLES MIN.
5. TEMPERATURE RANGE: -65 °C TO +165 °C

REV.	DATE	ECR NO.	DESCRIPTION
NC	11/15/10	XXXXXX	INITIAL RELEASE
A	02/07/13	2442	CORRECT P/N AND ERRORS IN THE BOM,UPDATE DRAWING FORMAT

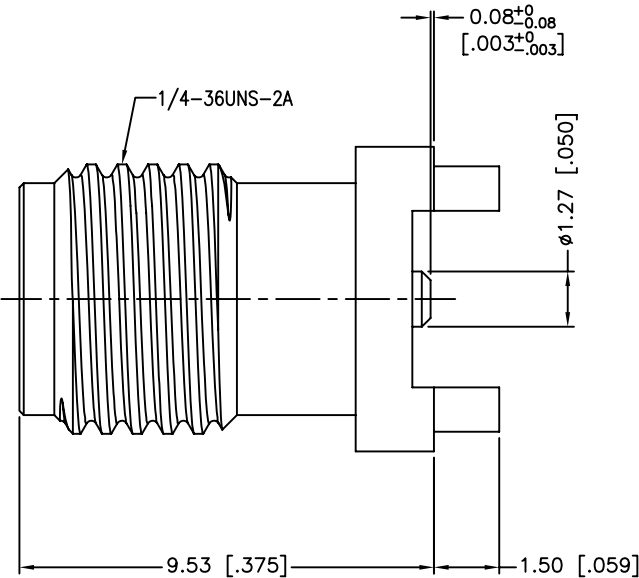

PCB MOUNTING HOLES

DESCRIPTION	MATERIAL	FINISH	QTY
3 CONTACT PIN	BER. COPPER	GOLD	1
2 INSULATOR	PTFE	NATURAL	1
1 BODY	BRASS	GOLD	1

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
<0.5 ± 0.05mm
0.5 - 6mm ± 0.10mm
6 - 30mm ± 0.20mm
30 - 120mm ± 0.30mm
ANGLES ± 1°
UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
<.020 ± 0.002"
.020 - .236 ± 0.002"
.236 - 1.180 ± 0.004"
1.180 - 4.724 ± 0.007"
ANGLES ± 1°
DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	11/15/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/132134-18.DWG

Amphenol Connex			
PART DESCRIPTION SMA P.C. B. JACK,SURFACE MOUNT CONTACT EXTENDED LEGS .059"			
PART NO. 132134-18			
DWG. NO.	132134-18.DWG	REV.	A
SIZE	A	SCALE	NA