


REV.	DATE	ECR NO.	DESCRIPTION
NC	11/17/10	-	INITIAL RELEASE

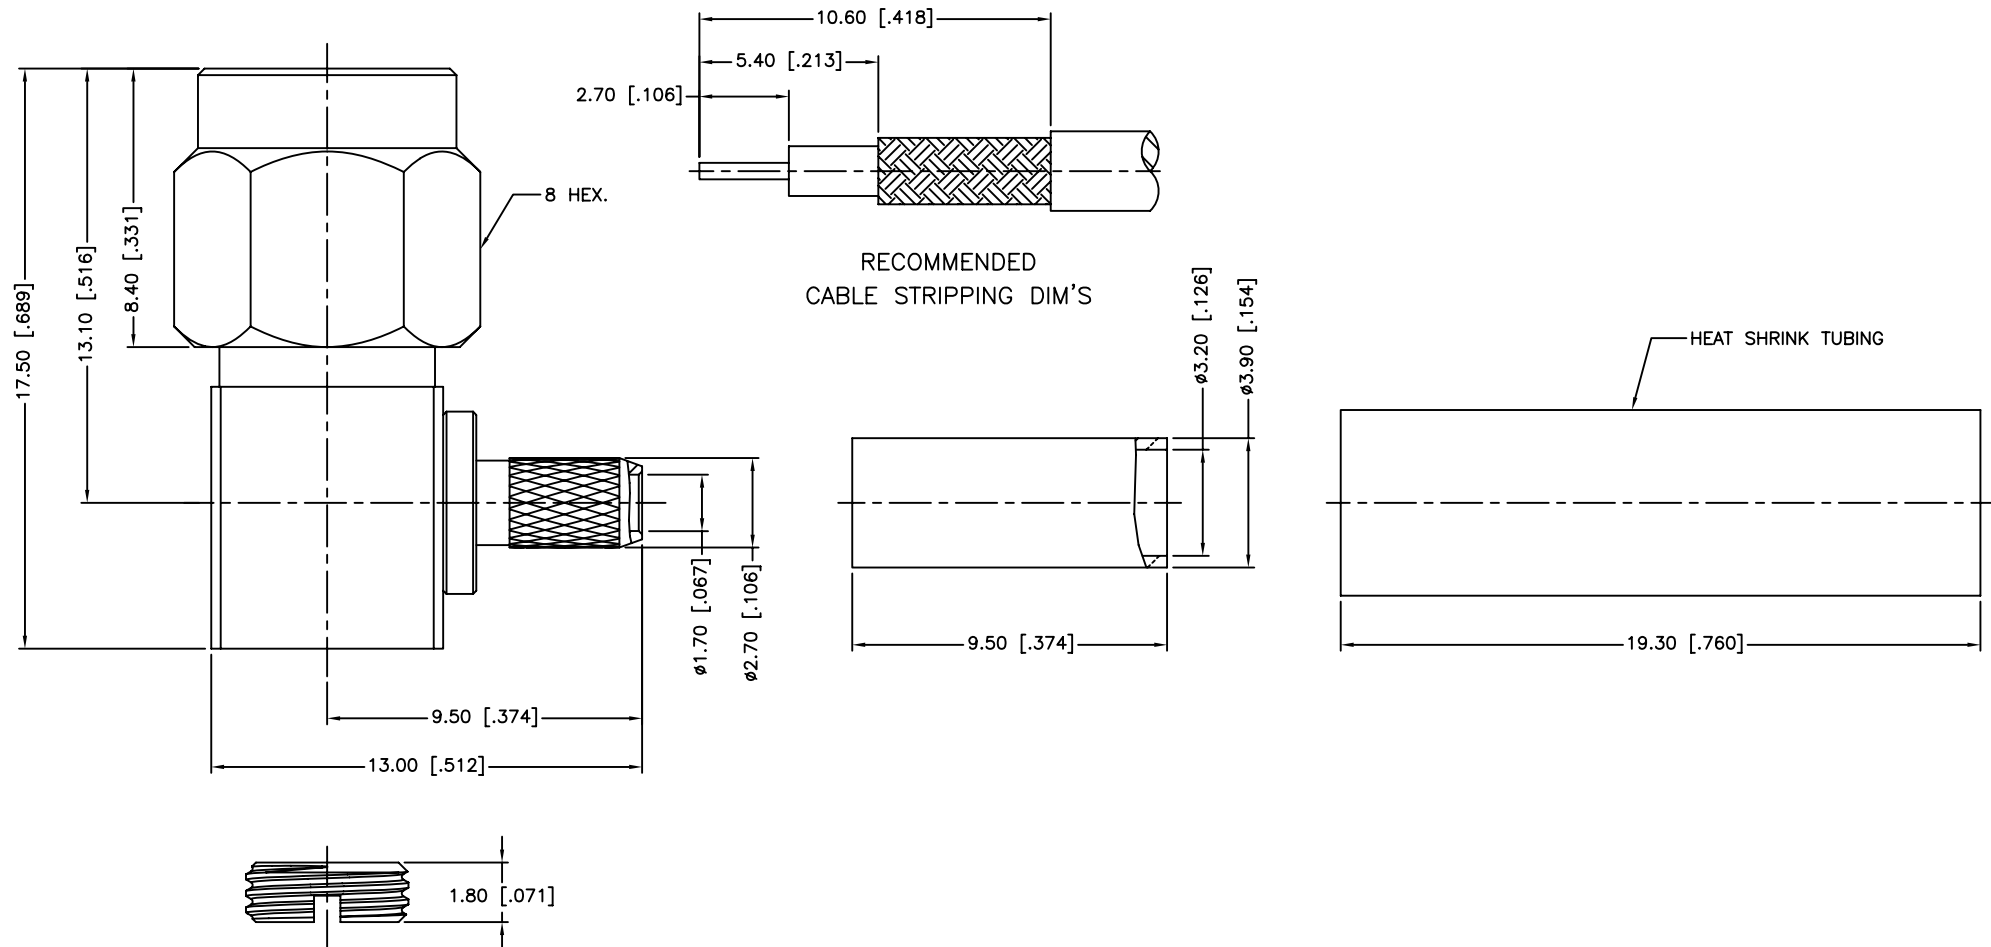

NOTES:

1. CRIMPED FERRULE
HEX CRIMP SIZE .128"
2. CONTACT PIN TO SOLDER

10	HEAT SHRINK TUBING		BLACK	1
9	FERRULE	BRASS	NICKEL	1
8	BARREL	STAINLESS STEEL	PASSIVATED	1
7	COVER	STAINLESS STEEL	PASSIVATED	1
6	HOUSING	STAINLESS STEEL	PASSIVATED	1
5	INSULATOR	PTFE	NATURAL	1
4	CONTACT PIN	BRASS	GOLD	1
3	RETAINER RING	SUS 304	NATURAL	1
2	GASKET	SILICONE	RED	1
1	SHELL	STAINLESS STEEL	PASSIVATED	1
	DESCRIPTION	MATERIAL	FINISH	QTY

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

APPROVALS	DATE
DRAWN M.ZHANG	11/17/10
CHECKED	
ISSUED	
SHEET 1 OF 1	
CAD FILE	C:/CONNEX/132123SS.DWG

Amphenol Connex

PART DESCRIPTION

SMA R/A CRIMP PLUG
(FOR RG-174/U,188A/U,316/U)

PART NO.

132123SS

DWG. NO.

132123SS.DWG

REV. NC

SIZE A

SCALE NA