
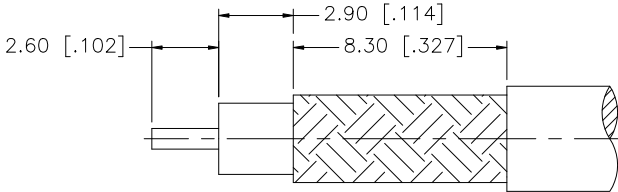

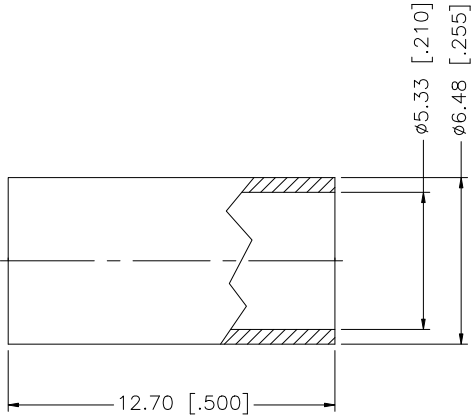


REV.	DATE	ECR NO.	DESCRIPTION
NC	06/11/00	—	INITIAL RELEASE
A	01/20/09	100072	UPDATE DRAWING FORMAT

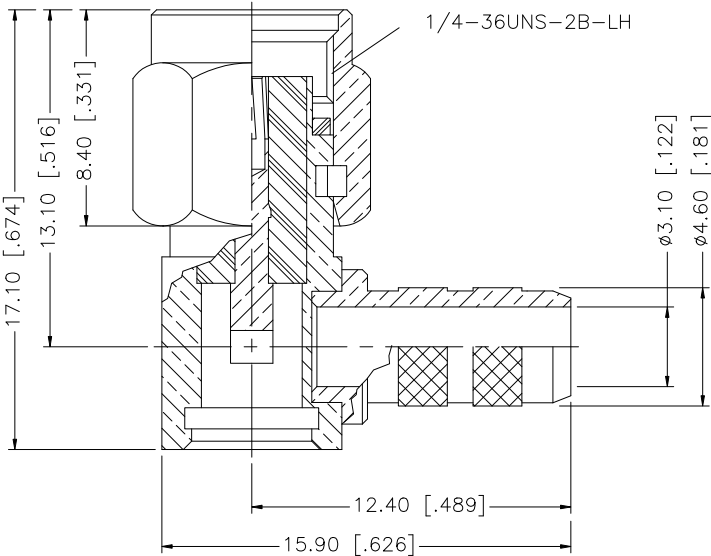

RECOMMENDED
CABLE STRIPPING DIM'S

8					UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007" .315 – 1.180 = ± 0.015" 1.180 – 4.724 = ± 0.020" DO NOT SCALE DRAWING	APPROVALS		DATE		Amphenol Connex								
7	FERRULE	COPPER	GOLD	1		DRAWN	GRS	01/20/09										
6	COVER	BRASS	GOLD	1		CHECKED				PART DESCRIPTION SMA R/A CRIMP PLUG (FOR RG-58C/U, 58/U – REVERSE THREAD)								
5	GASKET	SILICONE	RED	1		ISSUED												
4	RETAINER RING	BER. COPPER	NATURAL	1		SHEET		1 OF 1		PART NO. 132122RT								
3	CONTACT PIN	BRASS	GOLD	1		CAD FILE C:/132/132122RT.DWG												
2	INSULATOR	PTFE	NATURAL	1					DWG. NO.		132122RT.DWG		REV.	NC	SIZE	A	SCALE	NA
1	BODY	BRASS	GOLD	1														
DESCRIPTION		MATERIAL	FINISH	QTY														