
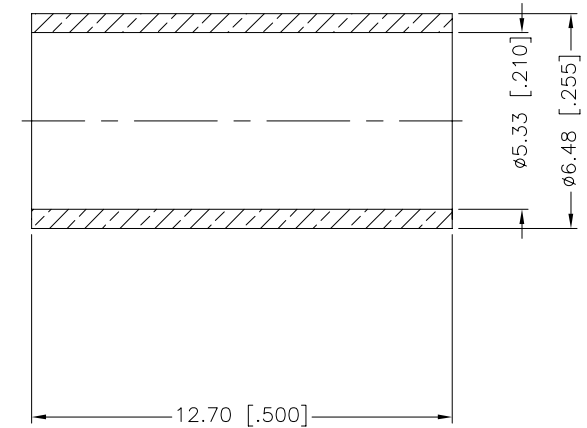
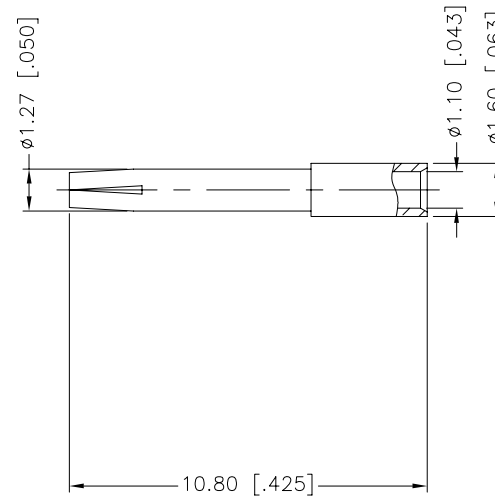
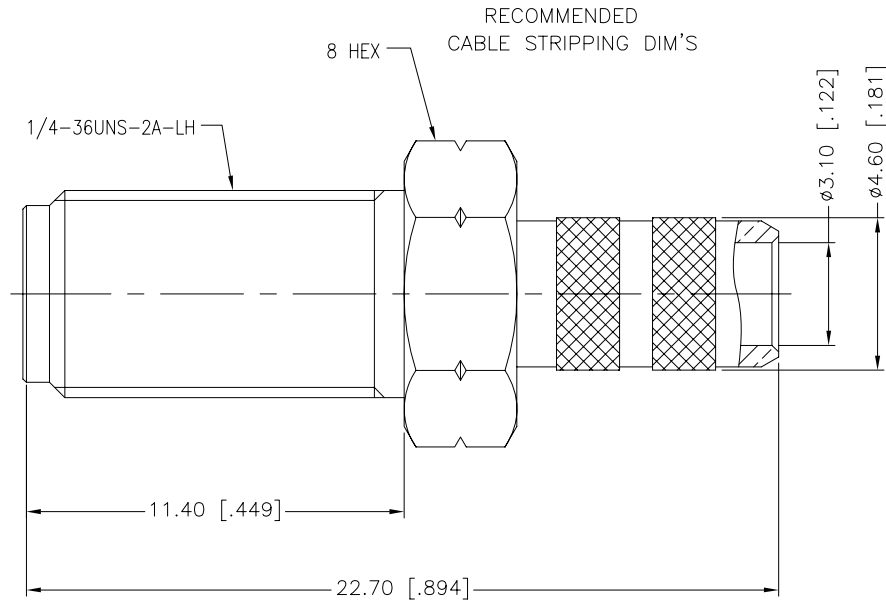


REV.	DATE	ECR NO.	DESCRIPTION
NC	05/21/10	XXXXXX	INITIAL RELEASE

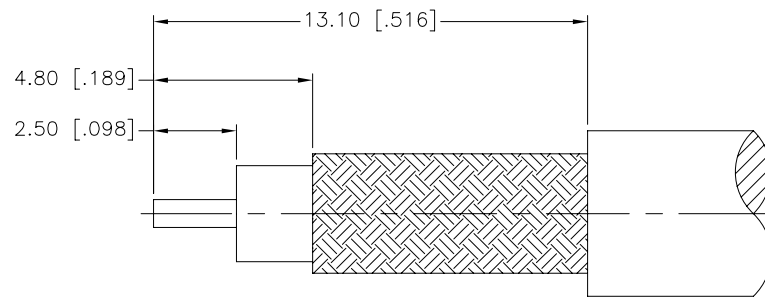

1. CRIMPED FERRULE
HEX CRIMP SIZE .213"
2. CONTACT PIN TO SOLDER

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY. UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE: 0.5 – 8mm ± 0.20mm 8 – 30mm ± 0.40mm 30 – 120mm ± 0.50mm UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE: .020 – .315 = ± 0.007” .315 – 1.180 = ± 0.015” 1.180 – 4.724 = ± 0.020” DO NOT SCALE DRAWING					APPROVALS		DATE		Amphenol Connex									
					DRAWN	M.ZHANG		05/21/10										
					CHECKED													
					ISSUED				PART DESCRIPTION									
					SHEET		1 OF 1				SMA CRIMP JACK W/ REVERSE THREAD (FOR RG-58C/U, 58/U CABLE)							
							PART NO.		132116RT									
					CAD FILE		C:/CONNEX/132116RT.DWG		DWG. NO.		132116RT.DWG		REV.	NC	SIZE	A	SCALE	NA
4	FERRULE	COPPER	GOLD	1														
3	CONTACT PIN	BER. COPPER	GOLD	1														
2	INSULATOR	PTFE	NATURAL	1														
1	BODY	BRASS	GOLD	1														
	DESCRIPTION	MATERIAL	FINISH	QTY														